

Model Name: GA-P55-UD3L 1.1

SHEET

TITLE

01	COVER SHEET
02	BOM & PCB MODIFY HISTORY
03	BLOCK DIAGRAM
04	CPU LGA1156-A
05	CPU LGA1156-B
06	CPU LGA1156-C
07	DDR III CHANNEL A
08	DDR III CHANNEL B
09	DDR III POWER CAP
10	PCH FDI,DMI,USB,PCIE,NVRAM
11	PCH DP,CLK BUFFER
12	PCH HOST,SATA,PCI
13	PCH GPIO,CTRL,AUDIO
14	PCH PWR,GND
15	PCI EXPRESS*16 SLOT
16	PCI EXPRESS*4 SLOT
17	PCI EXPRESS*1 SLOT
18	PCI SLOT X4
19	ITE 8720 LPC IO
20	COM, -PROHOT , DYNAMIC OC , LPT
21	Dual BIOS
22	ALC888
23	REAR AUDIO JACK
24	CLOCK GEN ICS9LPRS914
25	VCORE PWM ISL6334CR
26	CPU VTT PWM ISL6322G
27	DDR 15V & VCC1 05 PCH PWM ISL6545CBZ

SHEET

TITLE

28	DISCRETE POWER
29	F PANEL ,USB , FDD
30	ATX POWER
31	J363
32	REALTEK RTL8111D
33	TPM SLB9635TT
34	HWM,KB/MS , FAN CTRL
35	TABLE LIST
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	

Gigabyte Technology

Title		Cover Sheet	
Size	Document Number	GA-P55-UD3L	Rev
Custom			1.1
Date:	Friday, November 27, 2009	Sheet 1 of 35	

GA-P55-UD3L Version: 1.1


Component value change history

[illegible]

Circuit or PCB layout change
for next version

[illegible]

BLOCK DIAGRAM

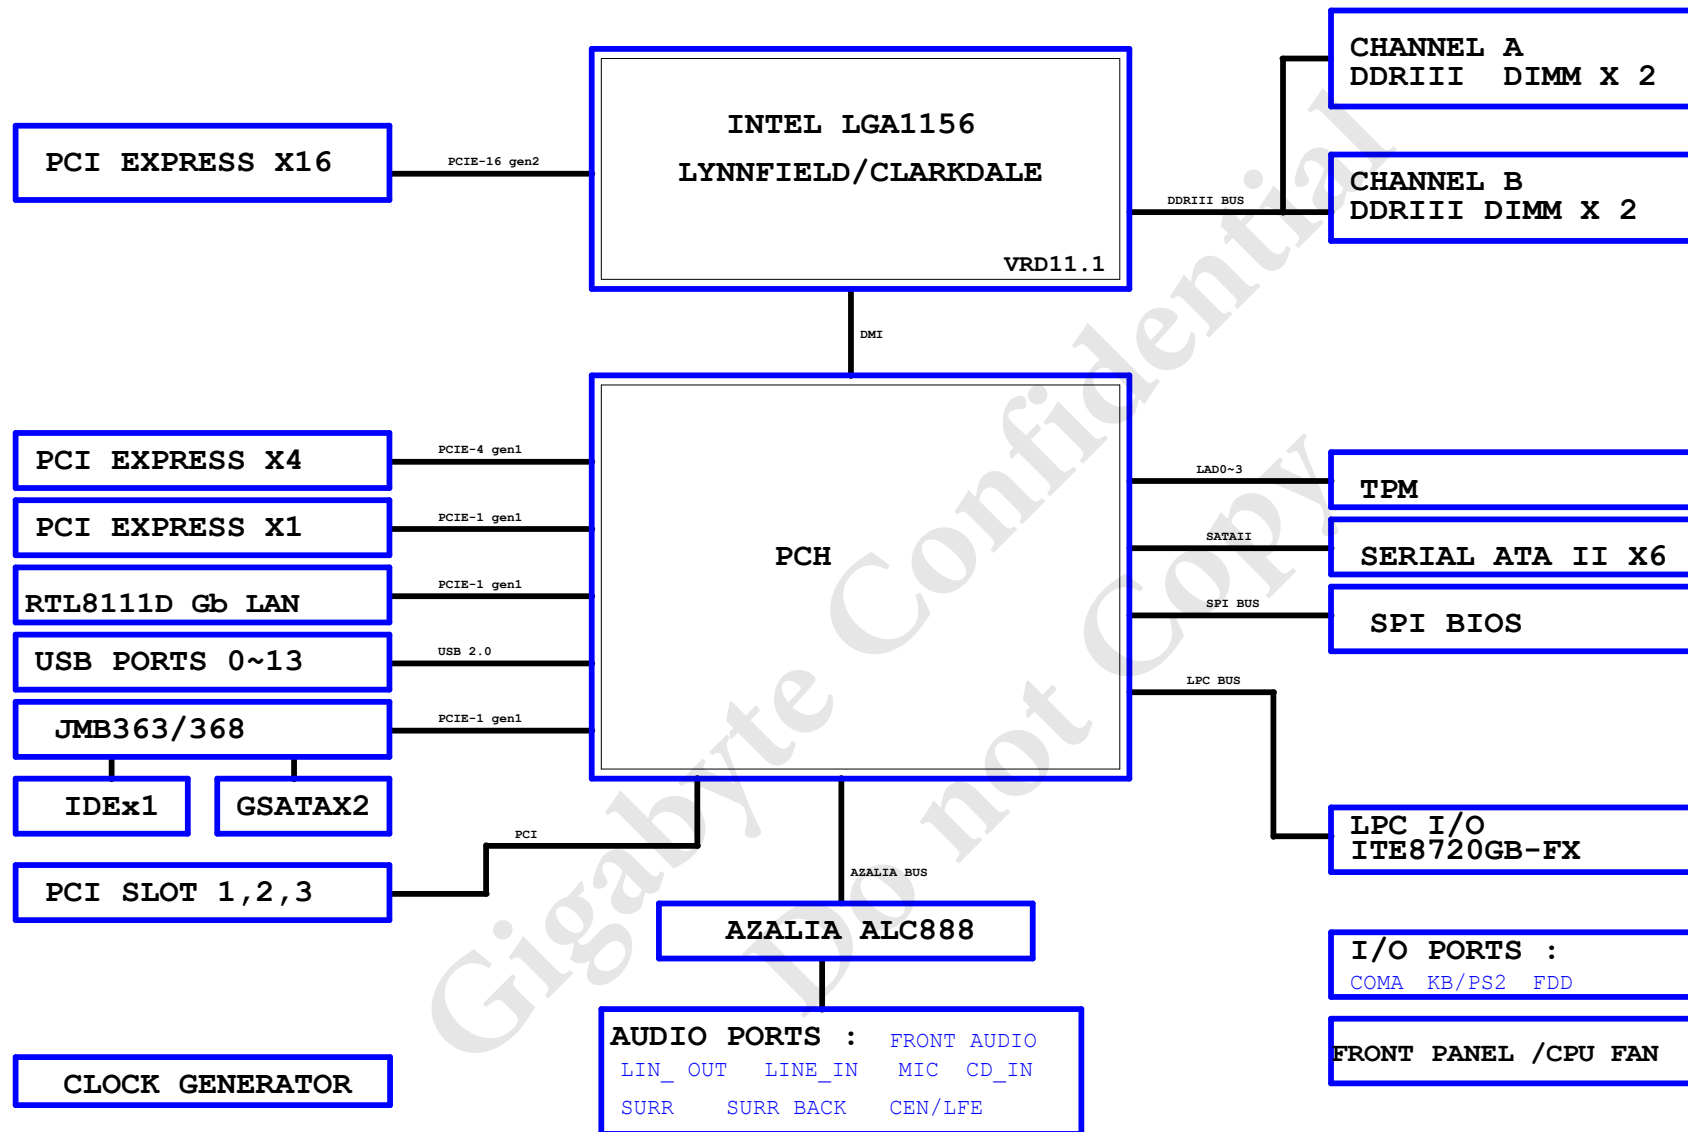

www.vinafix.com

Gigabyte Technology			
Title	BLOCK DIAGRAM		
Size	Document Number	GA-P55-UD3L	Rev 1.1
Date	Friday, November 27, 2009	Sheet 3	of 35



LGA1156A

MAAA0 AW18
MAAA1 AW15
MAAA2 AW15
MAAA3 AU15
MAAA4 AW14
MAAA5 AW13
MAAA6 AW14
MAAA7 AW13
MAAA8 AU14
MAAA9 AW12
MAAA10 AT19
MAAA11 AU13
MAAA12 AW11
MAAA13 AU24
MAAA14 AT11
MAAA15 AR10

SA_DQS[0] AK3 DQSA0
SA_DQS[0] A33 DQSA0
SA_DQS[0] A32 DMA0
SA_DQ[0] AH1 MDA0
SA_DQ[0] AH2 MDA1
SA_DQ[0] AL1 MDA3
SA_DQ[0] AG2 MDA4
SA_DQ[0] AH2 MDA5
SA_DQ[0] AK1 MDA6
SA_DQ[0] AK2 MDA7
SA_DQS[1] AP2 DQSA1
SA_DQS[1] A33 DQSA1
SA_DQ[1] AN1 DMA1

SA_WE# SA_DQ[8] AN2 MDA9
SA_CAS# SA_DQ[8] AN2 MDA9
SA_RAS# SA_DQ[8] AN2 MDA9
SA_DQ[10] AR3 MDA10
SA_DQ[10] AR3 MDA10
SA_DQ[10] AR3 MDA10
SA_DQ[10] AR3 MDA10
SA_DQ[10] AR3 MDA10
SA_DQ[10] AR3 MDA10

SA_BS[0] SBAB0 AU25
SA_BS[0] SBAB1 AU25
SA_BS[0] SBAB2 AU25
SA_BS[0] SBAB2 AU25
SA_BS[0] SBAB2 AU25
SA_BS[0] SBAB2 AU25

SA_DQS[2] AU4 DQSA2
SA_DQS[2] AU3 DQSA2
SA_DQS[2] AU1 DMA2
SA_DQ[16] AT4 MDA16
SA_DQ[17] AU2 MDA17
SA_DQ[17] AW3 MDA18
SA_DQ[18] AW4 MDA19
SA_DQ[19] AT3 MDA20
SA_DQ[20] AT1 MDA21
SA_DQ[21] AU2 MDA22
SA_DQ[22] AV4 MDA23

SA_DQS[3] AV8 DQSA3
SA_DQS[3] AV8 DQSA3
SA_DQS[3] AV6 DMA3
SA_DQ[24] AW5 MDA24
SA_DQ[25] AU8 MDA26
SA_DQ[26] AU8 MDA27
SA_DQ[27] AU5 MDA28
SA_DQ[28] AU5 MDA29
SA_DQ[29] AV7 MDA30
SA_DQ[30] AV7 MDA31
SA_DQ[31] AV7 MDA31

SA_DQS[4] AR28 DQSA4
SA_DQS[4] AT29 DQSA4
SA_DQS[4] AN29 DMA4
SA_DQ[32] AN27 MDA32
SA_DQ[33] AT28 MDA33
SA_DQ[34] AP28 MDA34
SA_DQ[35] AP30 MDA35
SA_DQ[36] AN26 MDA36
SA_DQ[37] AR27 MDA37
SA_DQ[38] AR29 MDA38
SA_DQ[39] AX30 MDA39

SA_DQS[5] AV32 DQSA5
SA_DQS[5] AW32 DQSA5
SA_DQS[5] AW31 DMA5
SA_DQ[40] AU30 MDA40
SA_DQ[41] AU31 MDA41
SA_DQ[42] AV33 MDA42
SA_DQ[43] AU34 MDA43
SA_DQ[44] AV30 MDA44
SA_DQ[45] AU30 MDA45
SA_DQ[46] AU33 MDA46
SA_DQ[47] AW33 MDA47

SA_DQS[6] AV36 DQSA6
SA_DQS[6] AV35 DQSA6
SA_DQS[6] AU35 DMA6
SA_DQ[48] AW35 MDA48
SA_DQ[49] AV35 MDA49
SA_DQ[50] AV37 MDA50
SA_DQ[51] AU37 MDA51
SA_DQ[52] AV34 MDA52
SA_DQ[53] AW34 MDA53
SA_DQ[54] AV36 MDA54
SA_DQ[55] AW37 MDA55

SA_DQS[7] AR39 DQSA7
SA_DQS[7] AR38 DQSA7
SA_DQS[7] AT38 DMA7
SA_DQ[56] AT39 MDA56
SA_DQ[57] AT40 MDA57
SA_DQ[58] AN38 MDA58
SA_DQ[59] AN39 MDA59
SA_DQ[60] AU38 MDA60
SA_DQ[61] AU39 MDA61
SA_DQ[62] AP39 MDA62
SA_DQ[63] AP40 MDA63

DDR_A

1 OF 10

LGA1156[10SC1-F01156-01R]

LGA1156B

MAAB0 AU20
MAAB1 AU18
MAAB2 AU18
MAAB3 AU17
MAAB4 AU18
MAAB5 AU17
MAAB6 AU16
MAAB7 AU16
MAAB8 AT17
MAAB9 AV16
MAAB10 AU25
MAAB11 AW16
MAAB12 AW15
MAAB13 AT12
MAAB14 AU12
MAAB15 AV11

SB_MA[0] SB_DQS[0] AF4 DQSB0
SB_MA[1] SB_DQS[0] AE5 DQSB0
SB_DQ[0] SB_DQ[0] AE4 DMB0
SB_DQ[0] AD7 MDB0
SB_DQ[1] AD6 MDB1
SB_DQ[1] AD6 MDB1
SB_DQ[1] AD6 MDB1
SB_DQ[1] AD6 MDB1
SB_DQ[1] AD6 MDB1
SB_DQ[1] AD6 MDB1

SB_WE# SB_DQ[8] AG5 MDB8
SB_CAS# SB_DQ[8] AG5 MDB8
SB_RAS# SB_DQ[8] AG5 MDB8
SB_DQ[10] SB_DQ[10] AG6 MDB10
SB_DQ[10] SB_DQ[10] AG6 MDB10
SB_DQ[10] SB_DQ[10] AG6 MDB10
SB_DQ[10] SB_DQ[10] AG6 MDB10

SB_BS[0] SBAB0 AU25
SB_BS[0] SBAB1 AU25
SB_BS[0] SBAB2 AU25
SB_BS[0] SBAB2 AU25
SB_BS[0] SBAB2 AU25
SB_BS[0] SBAB2 AU25

SB_CS[0] SBAB0 AU25
SB_CS[0] SBAB1 AU25
SB_CS[0] SBAB2 AU25
SB_CS[0] SBAB2 AU25
SB_CS[0] SBAB2 AU25
SB_CS[0] SBAB2 AU25

SB_DQS[2] AU4 DQSA2
SB_DQS[2] AU3 DQSA2
SB_DQS[2] AU1 DMA2
SB_DQ[16] AT4 MDA16
SB_DQ[17] AU2 MDA17
SB_DQ[17] AW3 MDA18
SB_DQ[18] AW4 MDA19
SB_DQ[19] AT3 MDA20
SB_DQ[20] AT1 MDA21
SB_DQ[21] AU2 MDA22
SB_DQ[22] AV4 MDA23

SB_DQS[3] AV8 DQSA3
SB_DQS[3] AV8 DQSA3
SB_DQS[3] AV6 DMA3
SB_DQ[24] AW5 MDA24
SB_DQ[25] AU8 MDA26
SB_DQ[26] AU8 MDA27
SB_DQ[27] AU5 MDA28
SB_DQ[28] AU5 MDA29
SB_DQ[29] AV7 MDA30
SB_DQ[30] AV7 MDA31
SB_DQ[31] AV7 MDA31

SB_DQS[4] AR28 DQSA4
SB_DQS[4] AT29 DQSA4
SB_DQS[4] AN29 DMA4
SB_DQ[32] AN27 MDA32
SB_DQ[33] AT28 MDA33
SB_DQ[34] AP28 MDA34
SB_DQ[35] AP30 MDA35
SB_DQ[36] AN26 MDA36
SB_DQ[37] AR27 MDA37
SB_DQ[38] AR29 MDA38
SB_DQ[39] AX30 MDA39

SB_DQS[5] AV32 DQSA5
SB_DQS[5] AW32 DQSA5
SB_DQS[5] AW31 DMA5
SB_DQ[40] AU30 MDA40
SB_DQ[41] AU31 MDA41
SB_DQ[42] AV33 MDA42
SB_DQ[43] AU34 MDA43
SB_DQ[44] AV30 MDA44
SB_DQ[45] AU30 MDA45
SB_DQ[46] AU33 MDA46
SB_DQ[47] AW33 MDA47

SB_DQS[6] AV36 DQSA6
SB_DQS[6] AV35 DQSA6
SB_DQS[6] AU35 DMA6
SB_DQ[48] AW35 MDA48
SB_DQ[49] AV35 MDA49
SB_DQ[50] AV37 MDA50
SB_DQ[51] AU37 MDA51
SB_DQ[52] AV34 MDA52
SB_DQ[53] AW34 MDA53
SB_DQ[54] AV36 MDA54
SB_DQ[55] AW37 MDA55

SB_DQS[7] AR39 DQSA7
SB_DQS[7] AR38 DQSA7
SB_DQS[7] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[8] AR39 DQSA7
SB_DQS[8] AR38 DQSA7
SB_DQS[8] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[9] AR39 DQSA7
SB_DQS[9] AR38 DQSA7
SB_DQS[9] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[10] AR39 DQSA7
SB_DQS[10] AR38 DQSA7
SB_DQS[10] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[11] AR39 DQSA7
SB_DQS[11] AR38 DQSA7
SB_DQS[11] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[12] AR39 DQSA7
SB_DQS[12] AR38 DQSA7
SB_DQS[12] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[13] AR39 DQSA7
SB_DQS[13] AR38 DQSA7
SB_DQS[13] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[14] AR39 DQSA7
SB_DQS[14] AR38 DQSA7
SB_DQS[14] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[15] AR39 DQSA7
SB_DQS[15] AR38 DQSA7
SB_DQS[15] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[16] AR39 DQSA7
SB_DQS[16] AR38 DQSA7
SB_DQS[16] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[17] AR39 DQSA7
SB_DQS[17] AR38 DQSA7
SB_DQS[17] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[18] AR39 DQSA7
SB_DQS[18] AR38 DQSA7
SB_DQS[18] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[19] AR39 DQSA7
SB_DQS[19] AR38 DQSA7
SB_DQS[19] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[20] AR39 DQSA7
SB_DQS[20] AR38 DQSA7
SB_DQS[20] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[21] AR39 DQSA7
SB_DQS[21] AR38 DQSA7
SB_DQS[21] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[22] AR39 DQSA7
SB_DQS[22] AR38 DQSA7
SB_DQS[22] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[23] AR39 DQSA7
SB_DQS[23] AR38 DQSA7
SB_DQS[23] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[24] AR39 DQSA7
SB_DQS[24] AR38 DQSA7
SB_DQS[24] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[25] AR39 DQSA7
SB_DQS[25] AR38 DQSA7
SB_DQS[25] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63


SB_DQS[26] AR39 DQSA7
SB_DQS[26] AR38 DQSA7
SB_DQS[26] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

SB_DQS[27] AR39 DQSA7
SB_DQS[27] AR38 DQSA7
SB_DQS[27] AT38 DMA7
SB_DQ[56] AT39 MDA56
SB_DQ[57] AT40 MDA57
SB_DQ[58] AN38 MDA58
SB_DQ[59] AN39 MDA59
SB_DQ[60] AU38 MDA60
SB_DQ[61] AU39 MDA61
SB_DQ[62] AP39 MDA62
SB_DQ[63] AP40 MDA63

DDR_B

2 OF 10

LGA1156[10SC1-F01156-01R]



Need check the new CPU ME

LGA1156




PLATE+LM[12KRC-0F0001-01R]

Gigabyte Technology

CPU LGA1156-B

Size Document Number
Custom GA-P55-UD3L
Date: Friday, November 27, 2009 Sheet 5 of 35

Rev 1.1


















DDR TERMINATION CHANNEL A/B

DDR15V Decouple

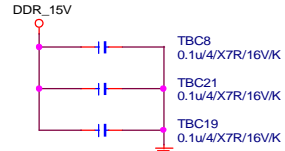


DDRVTT Decouple

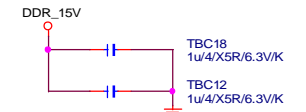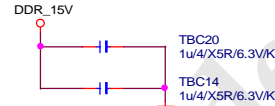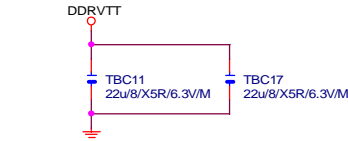


COUPON1 COUPON1 1 2 COUPONX VCC3


COUPON2 COUPON2 1 2 COUPONX

Gigabyte Technology			
Title			
DDRIII POWER CAP			
Size	Document Number	GA-P55-UD3L	Rev
B			1.1
Date:	Friday, November 27, 2009	Sheet	9 of 35

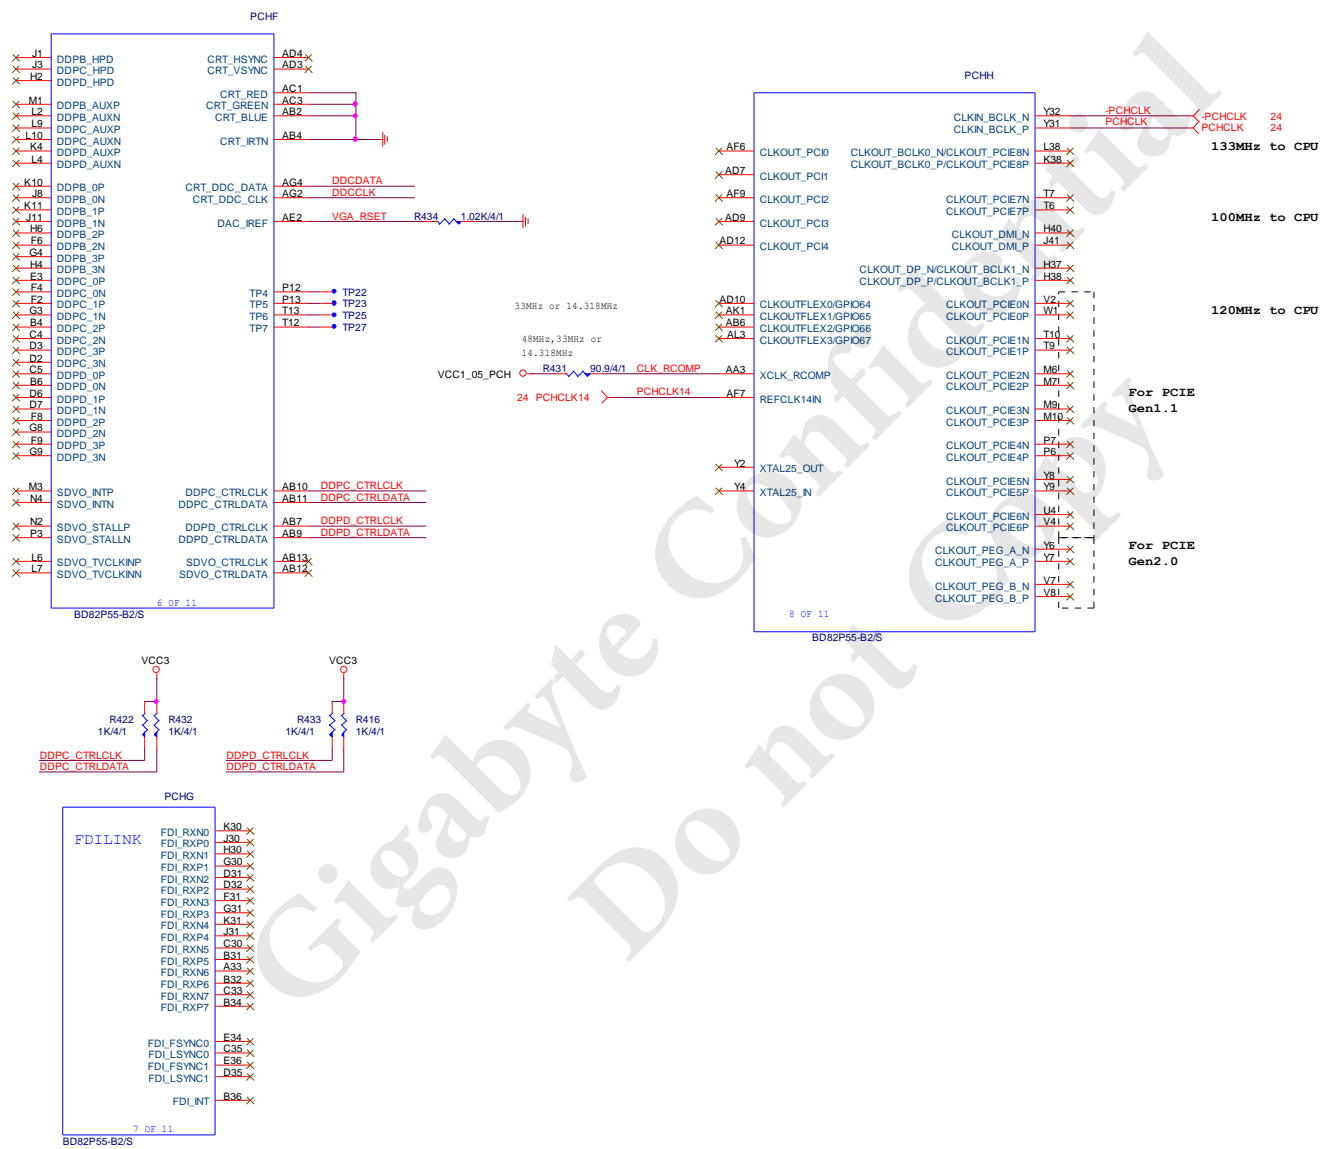




Gigabyte Technology			
Title			
PCH DISPLAY ,CLK BUFFER			
Size	Document Number	Rev	
Custom	GA-P55-UD3L	1.1	
Date:	Friday, November 27, 2009	Sheet	11 of 35

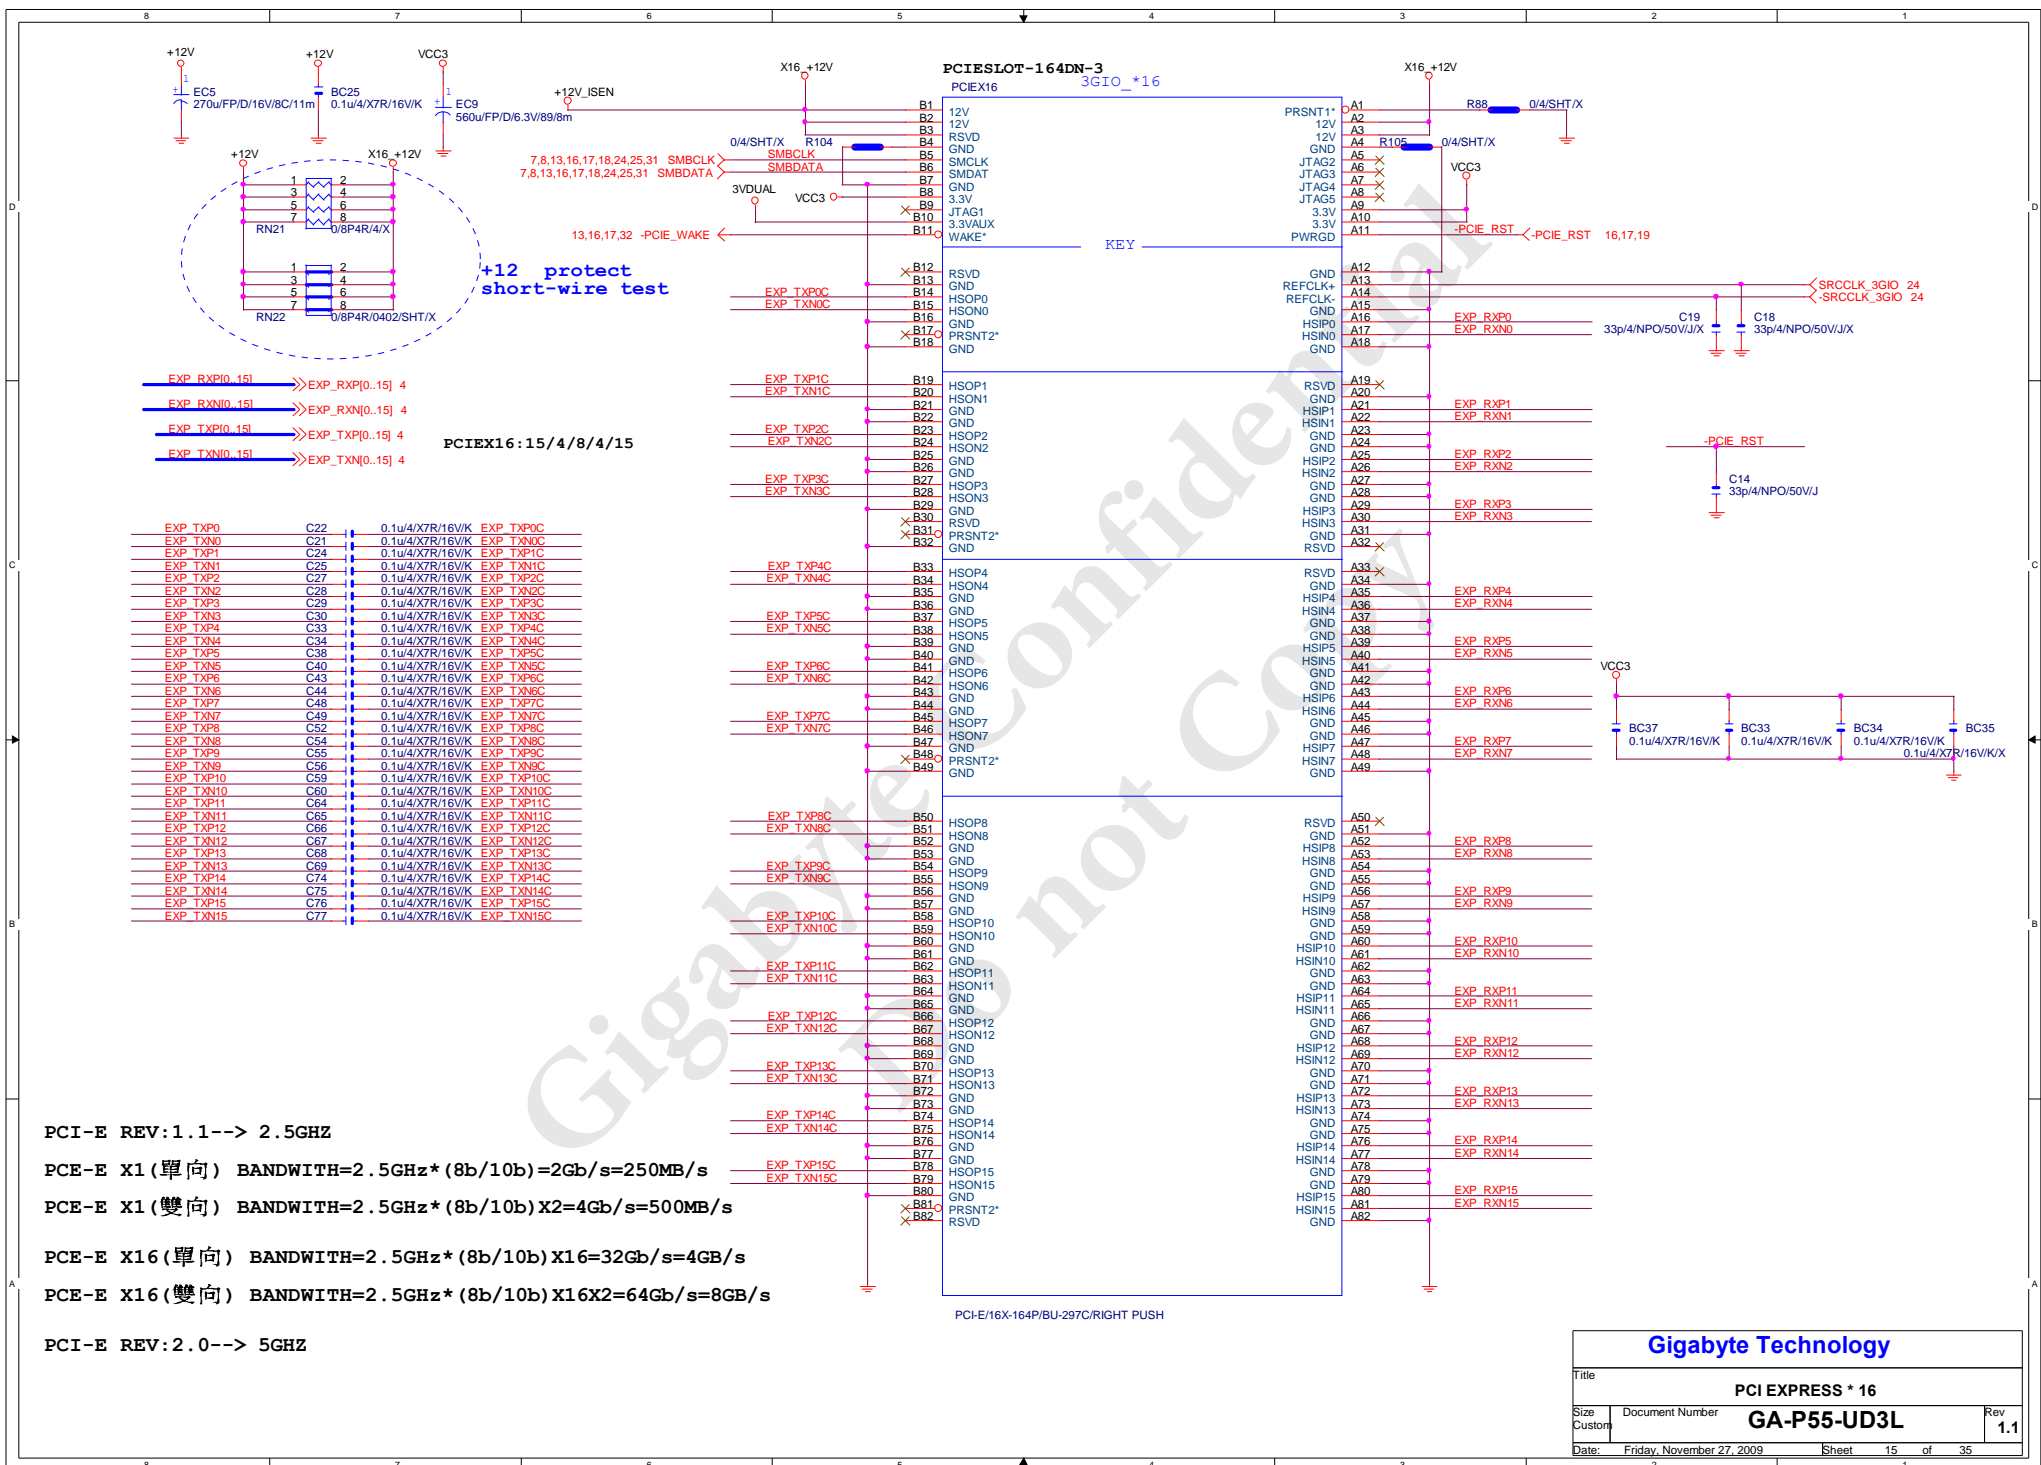

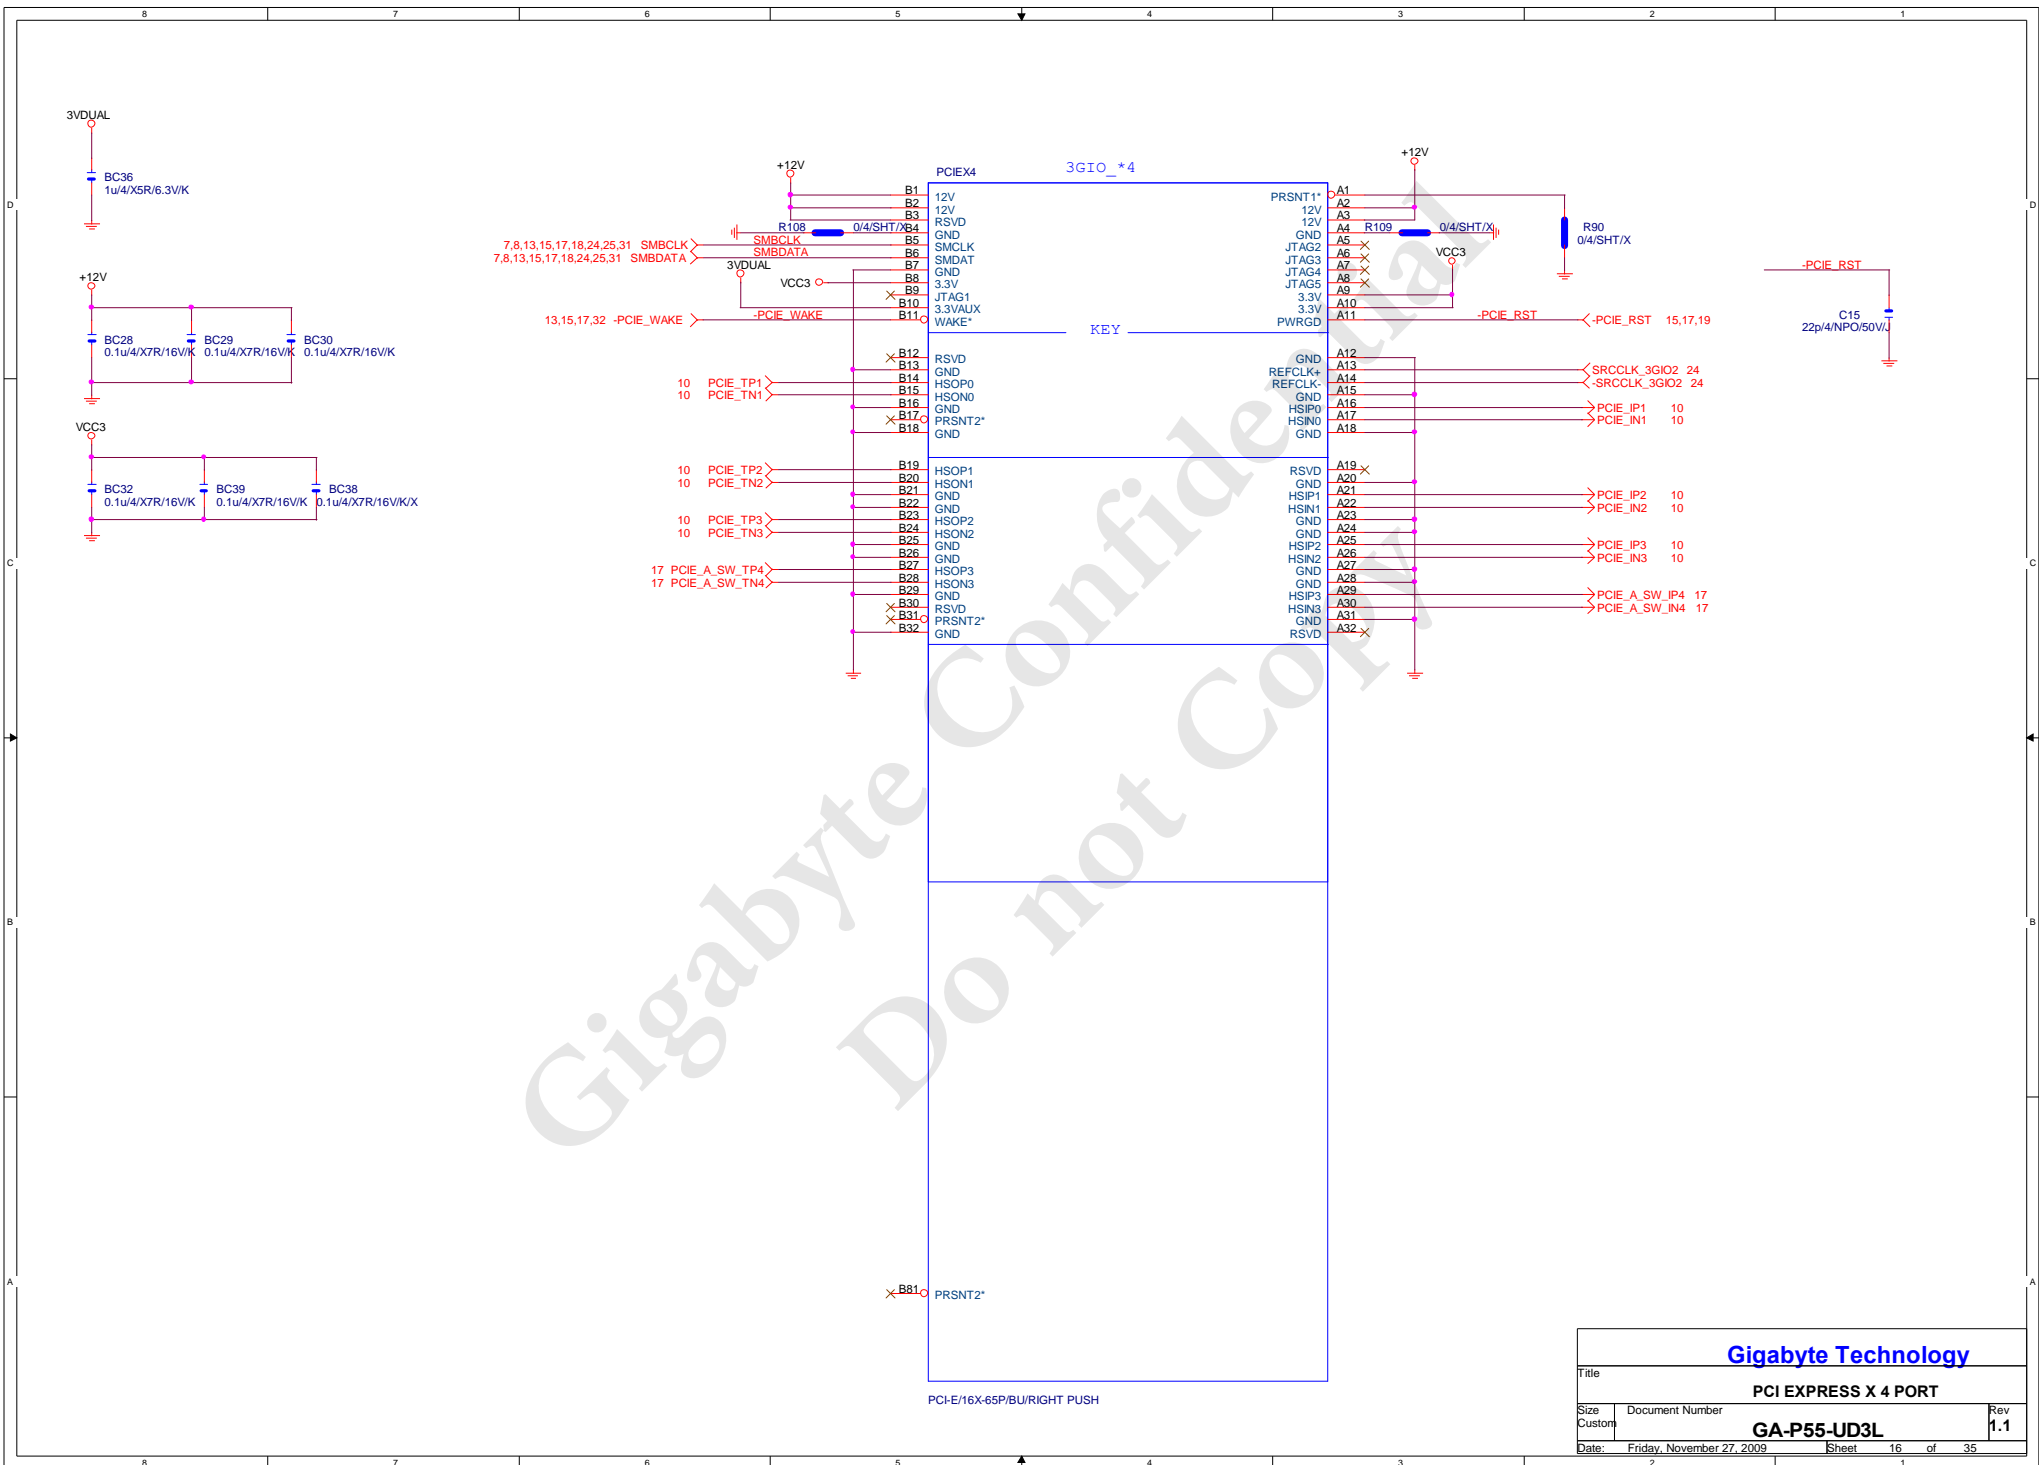


PCIE*1

PCIE1 3GIO_X1

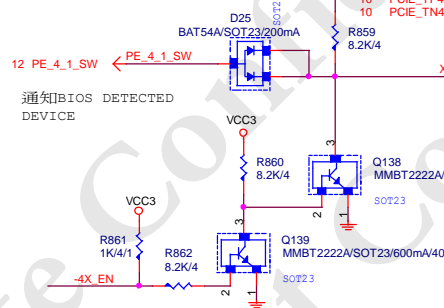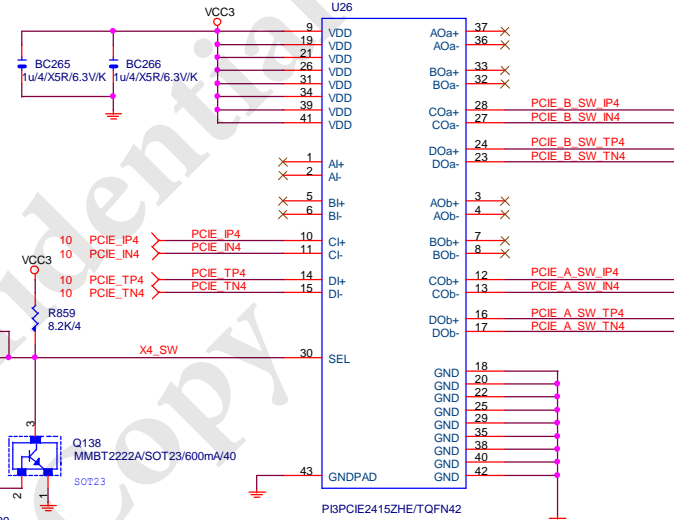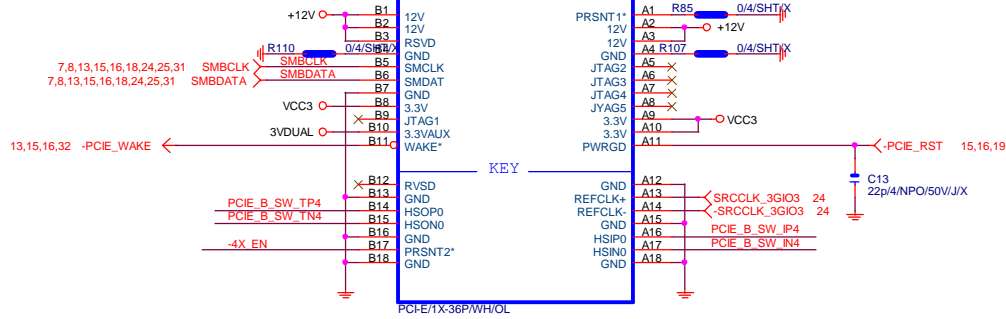



Function	SEL
xI--> xOa	L;PCIE4 SLOT-->X1
xI--> xOb	H;PCIE4 SLOT-->X4

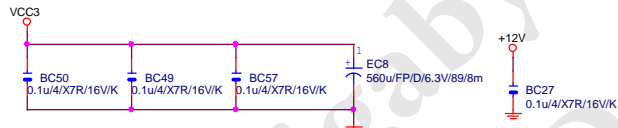

Gigabyte Technology

Title		PCIE X1 1,2	
Size	Custom	Document Number	GA-P55-UD3L
Date:	Friday, November 27, 2009	Sheet	17 of 35
		Rev	1.1

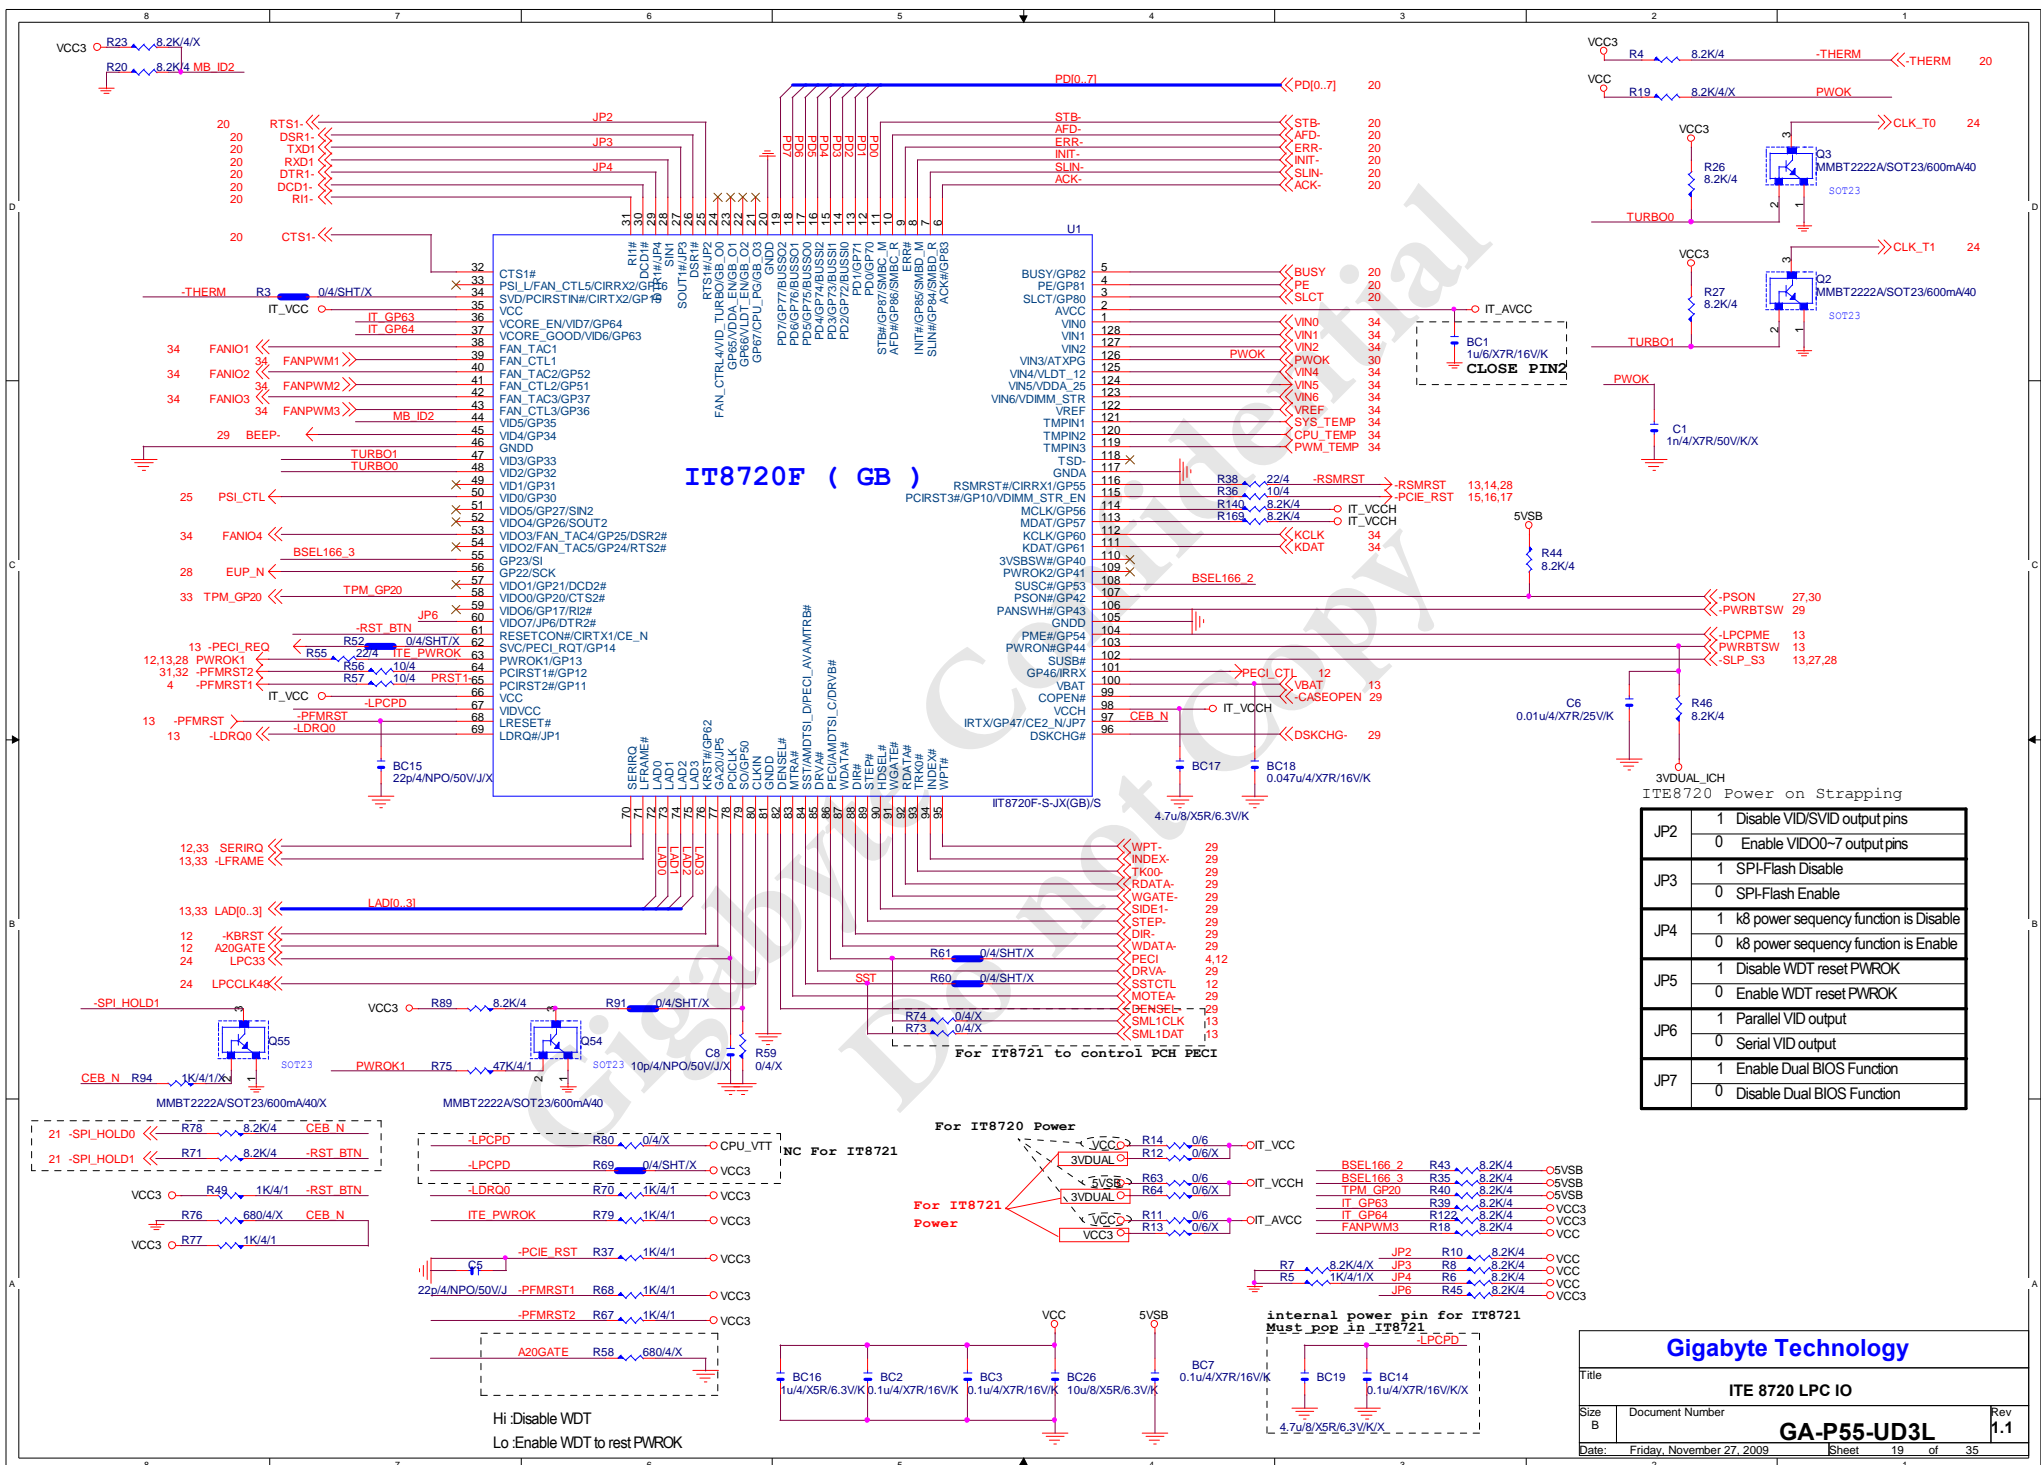

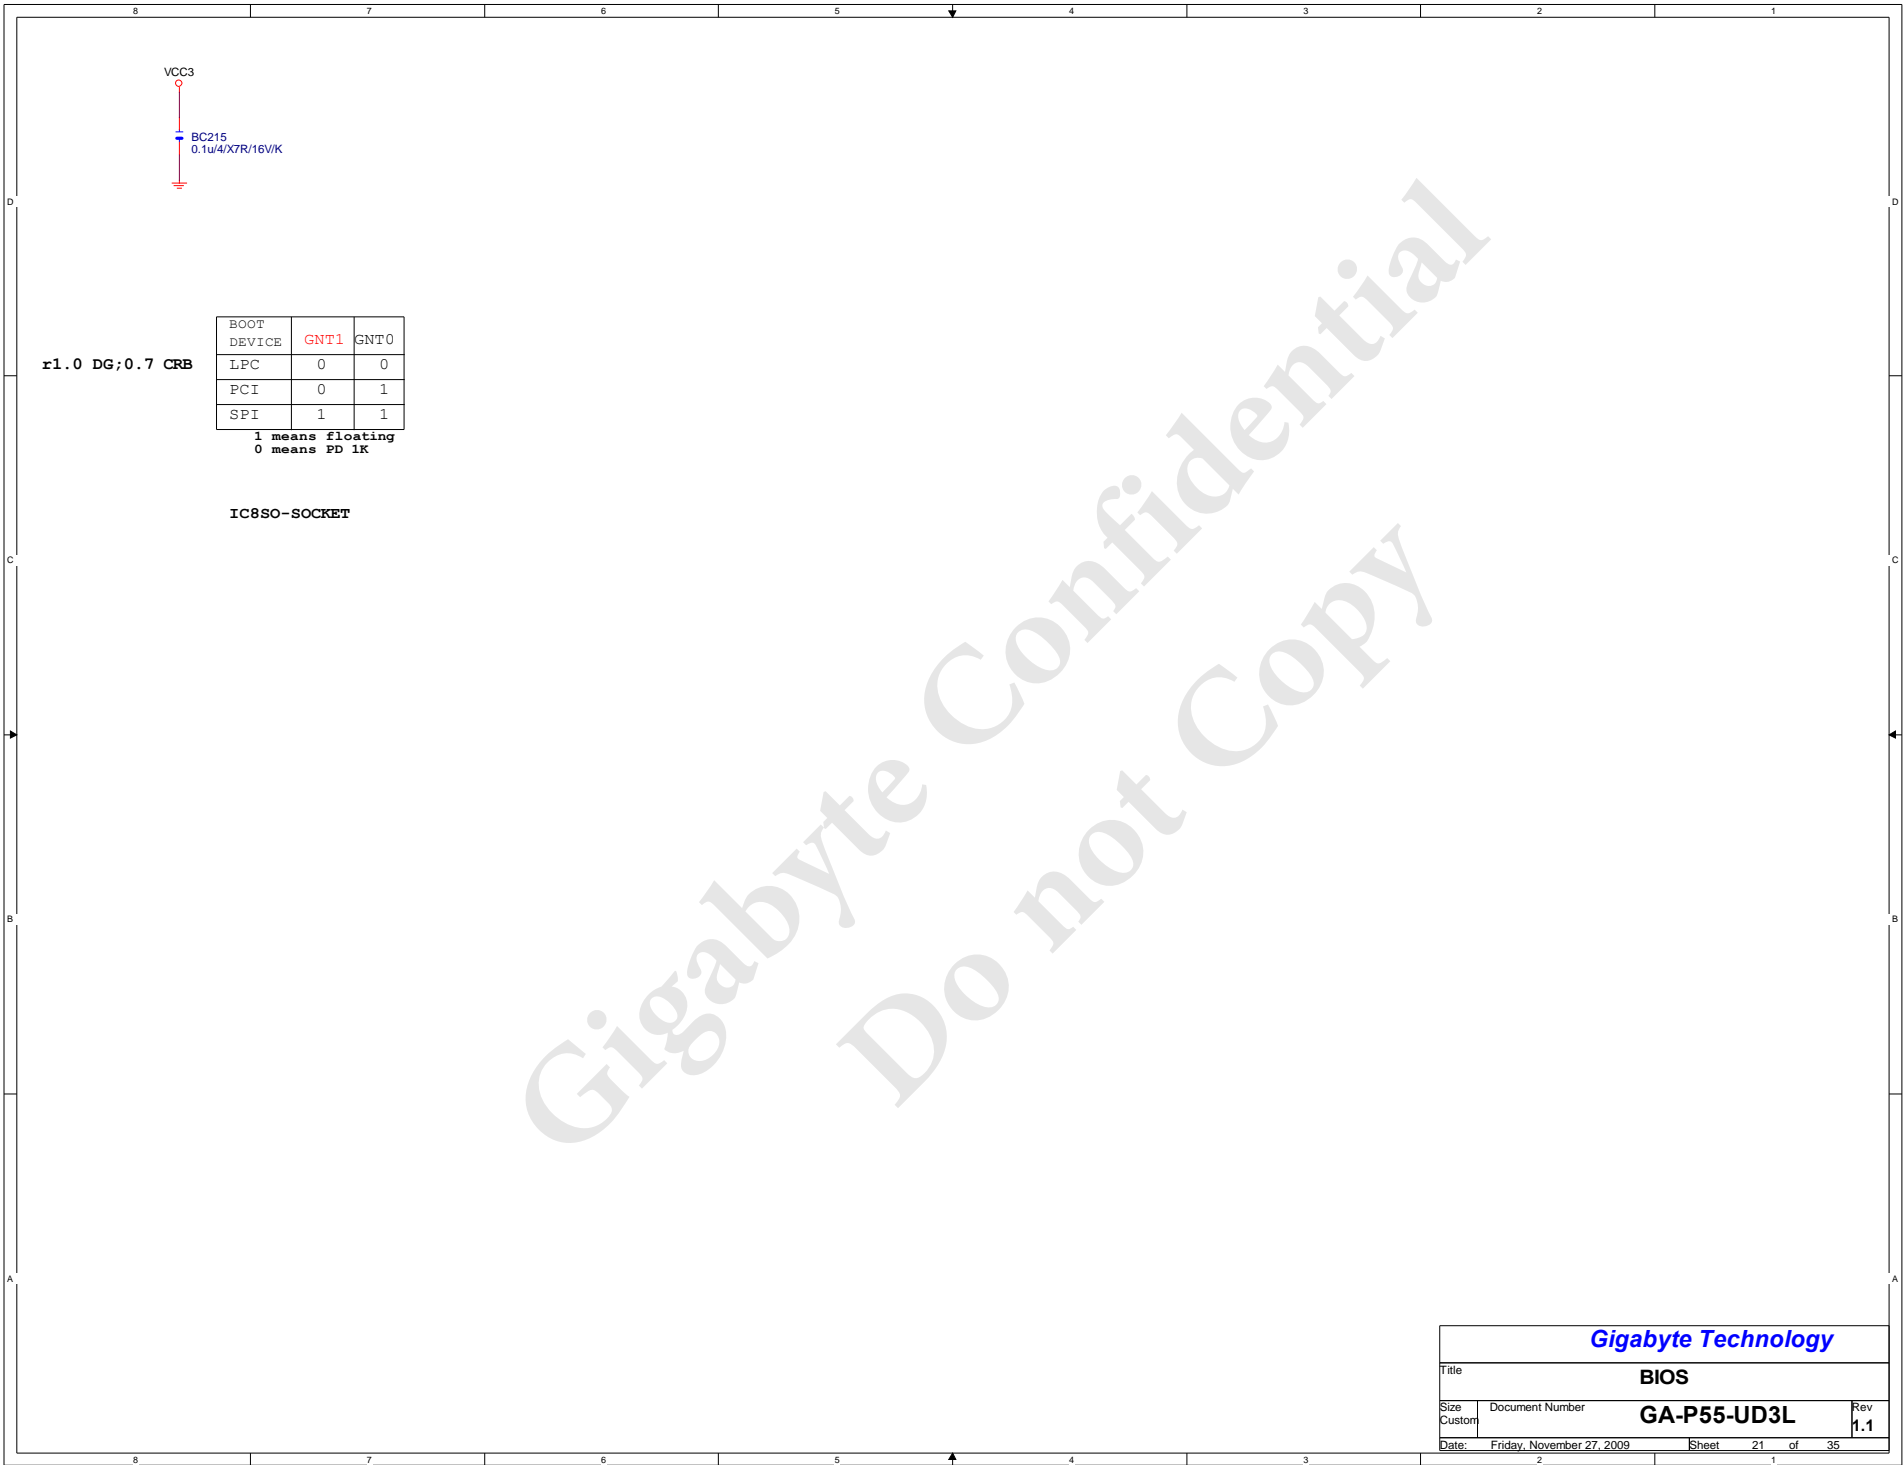

r1.0 DG;0.7 CRB


BOOT DEVICE	GNT1	GNT0
LPC	0	0
PCI	0	1
SPI	1	1


1 means floating
0 means PD 1K


IC8SO-SOCKET

Gigabyte Technology		
Title		BIOS
Size	Document Number	GA-P55-UD3L
Custom		Rev 1.1
Date:	Friday, November 27, 2009	Sheet 21 of 35

	ALC888-VA ALC888-VC2	ALC888S-VC ALC888B ALC892	ALC889A	ALC889A
CR49	O	X	O	O
CR46	X	X	O	X
CR57	X	X	O	X
CR47	X	O	X	O
CR48	O	X	O	X
CR26	20K/1%	20K/0.1%	20K/1%	20K/1%

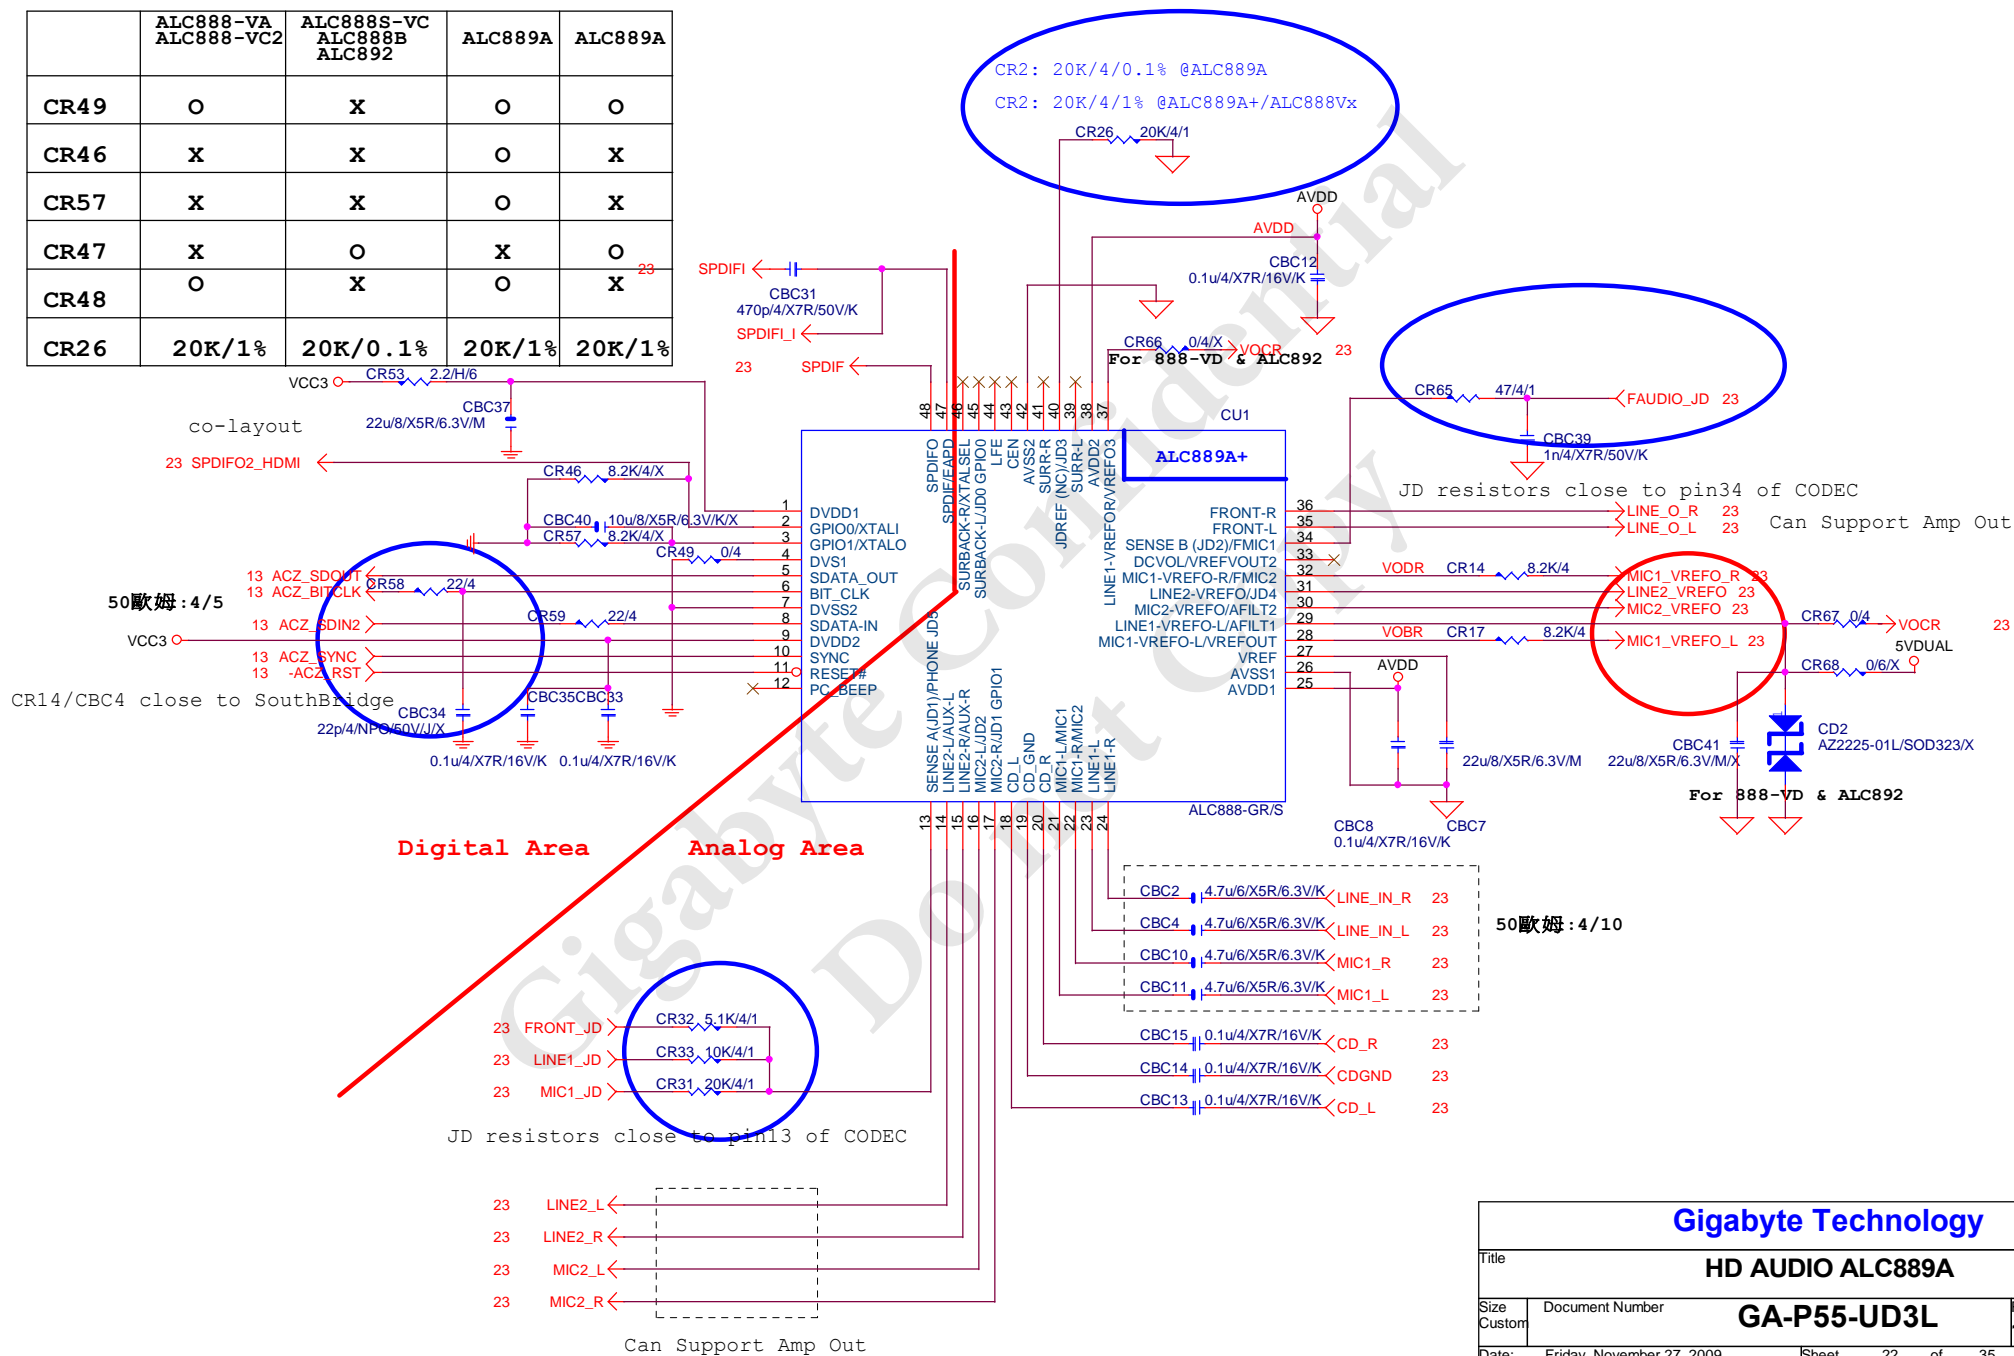

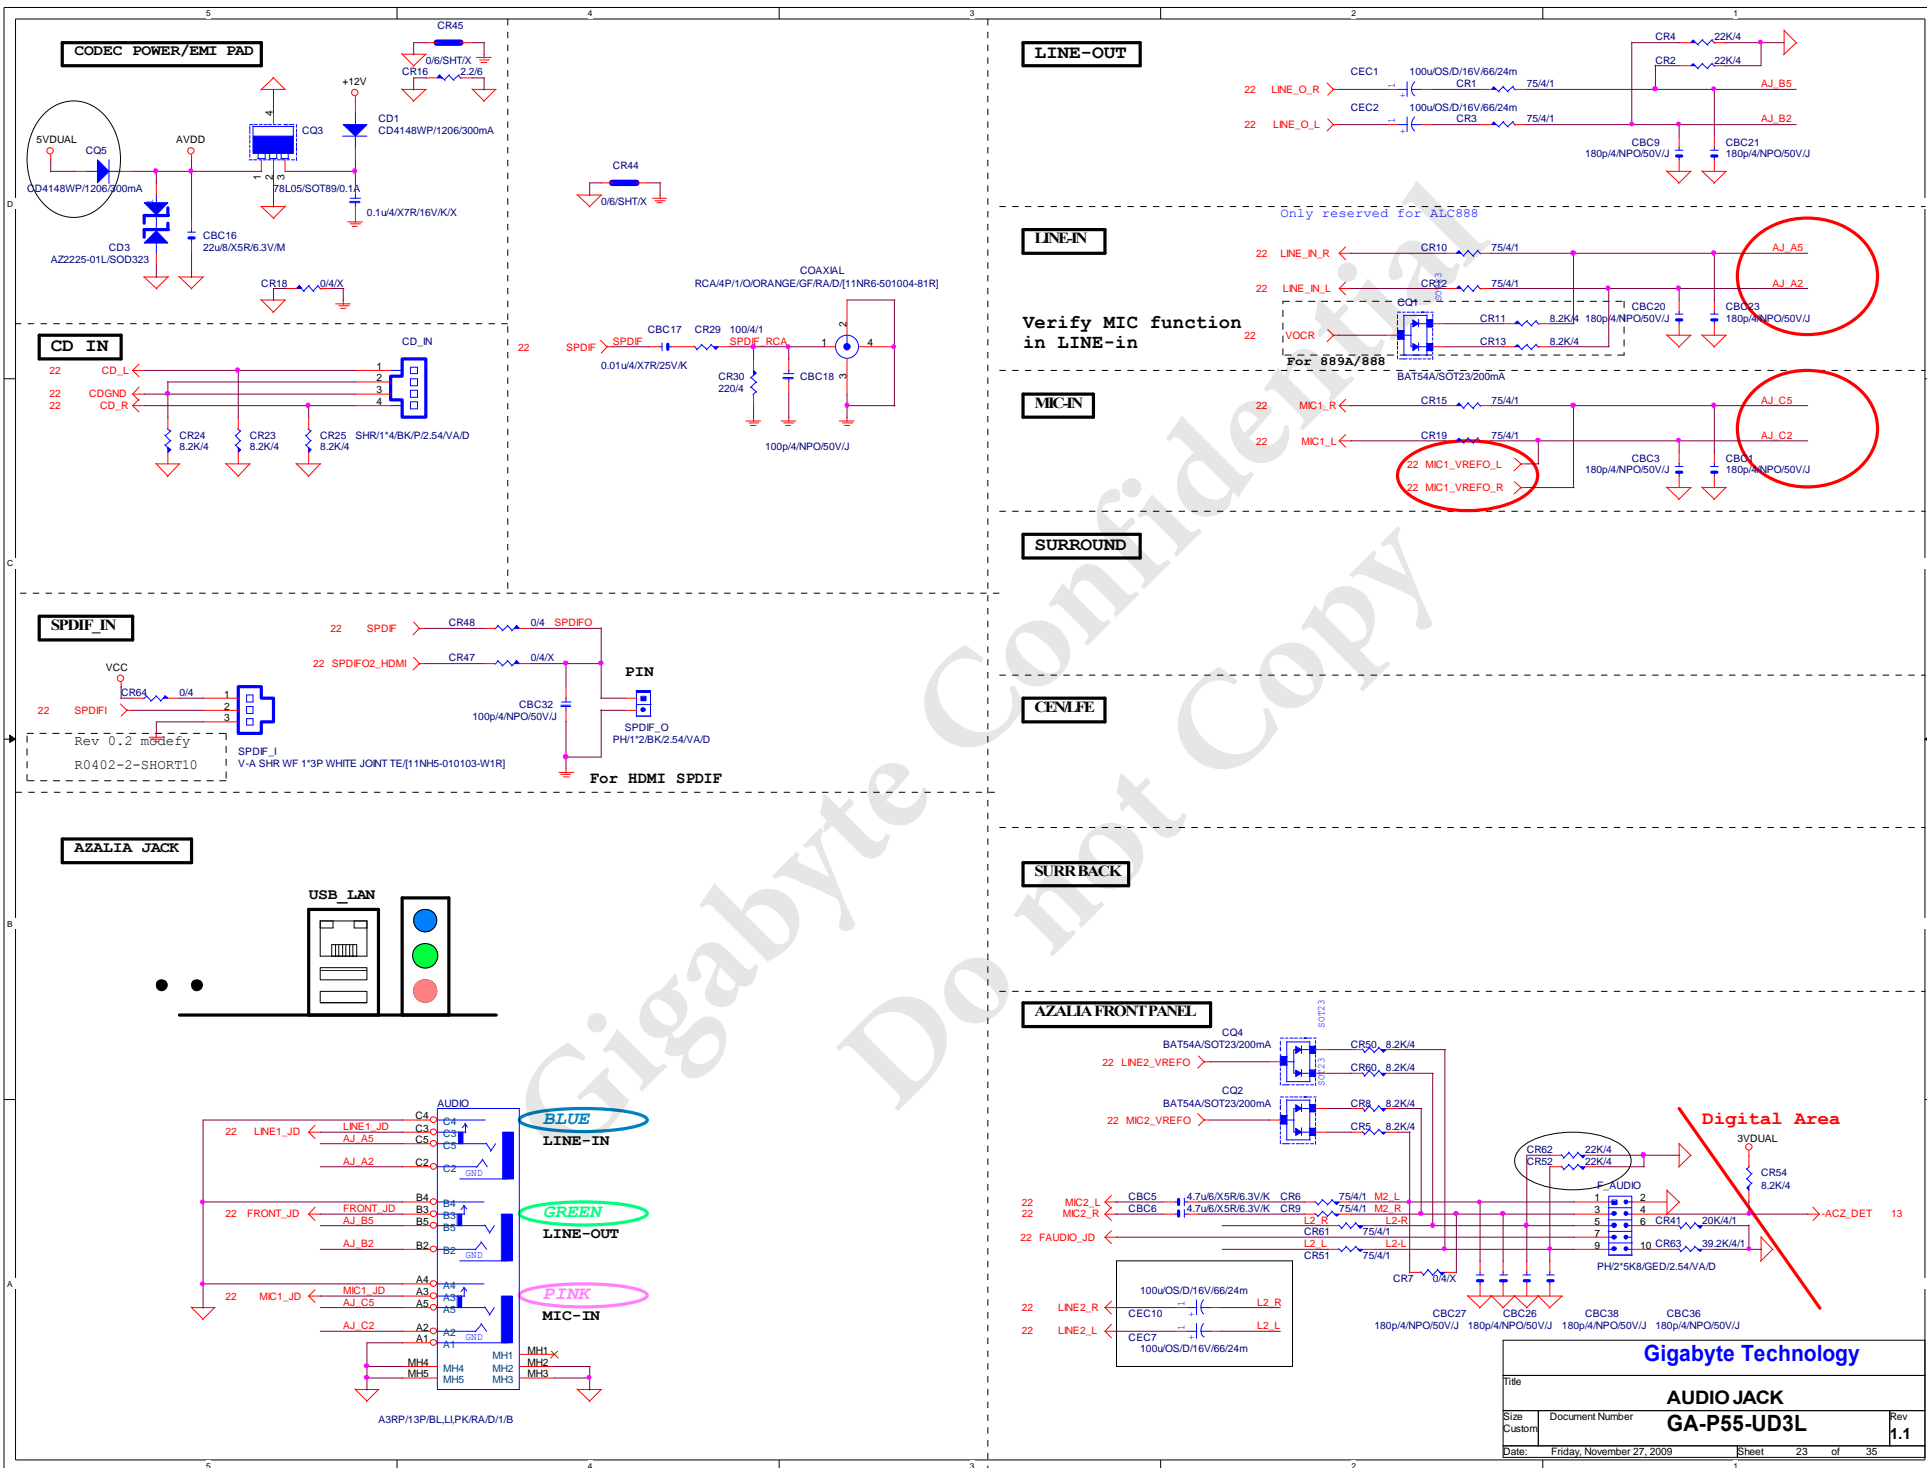

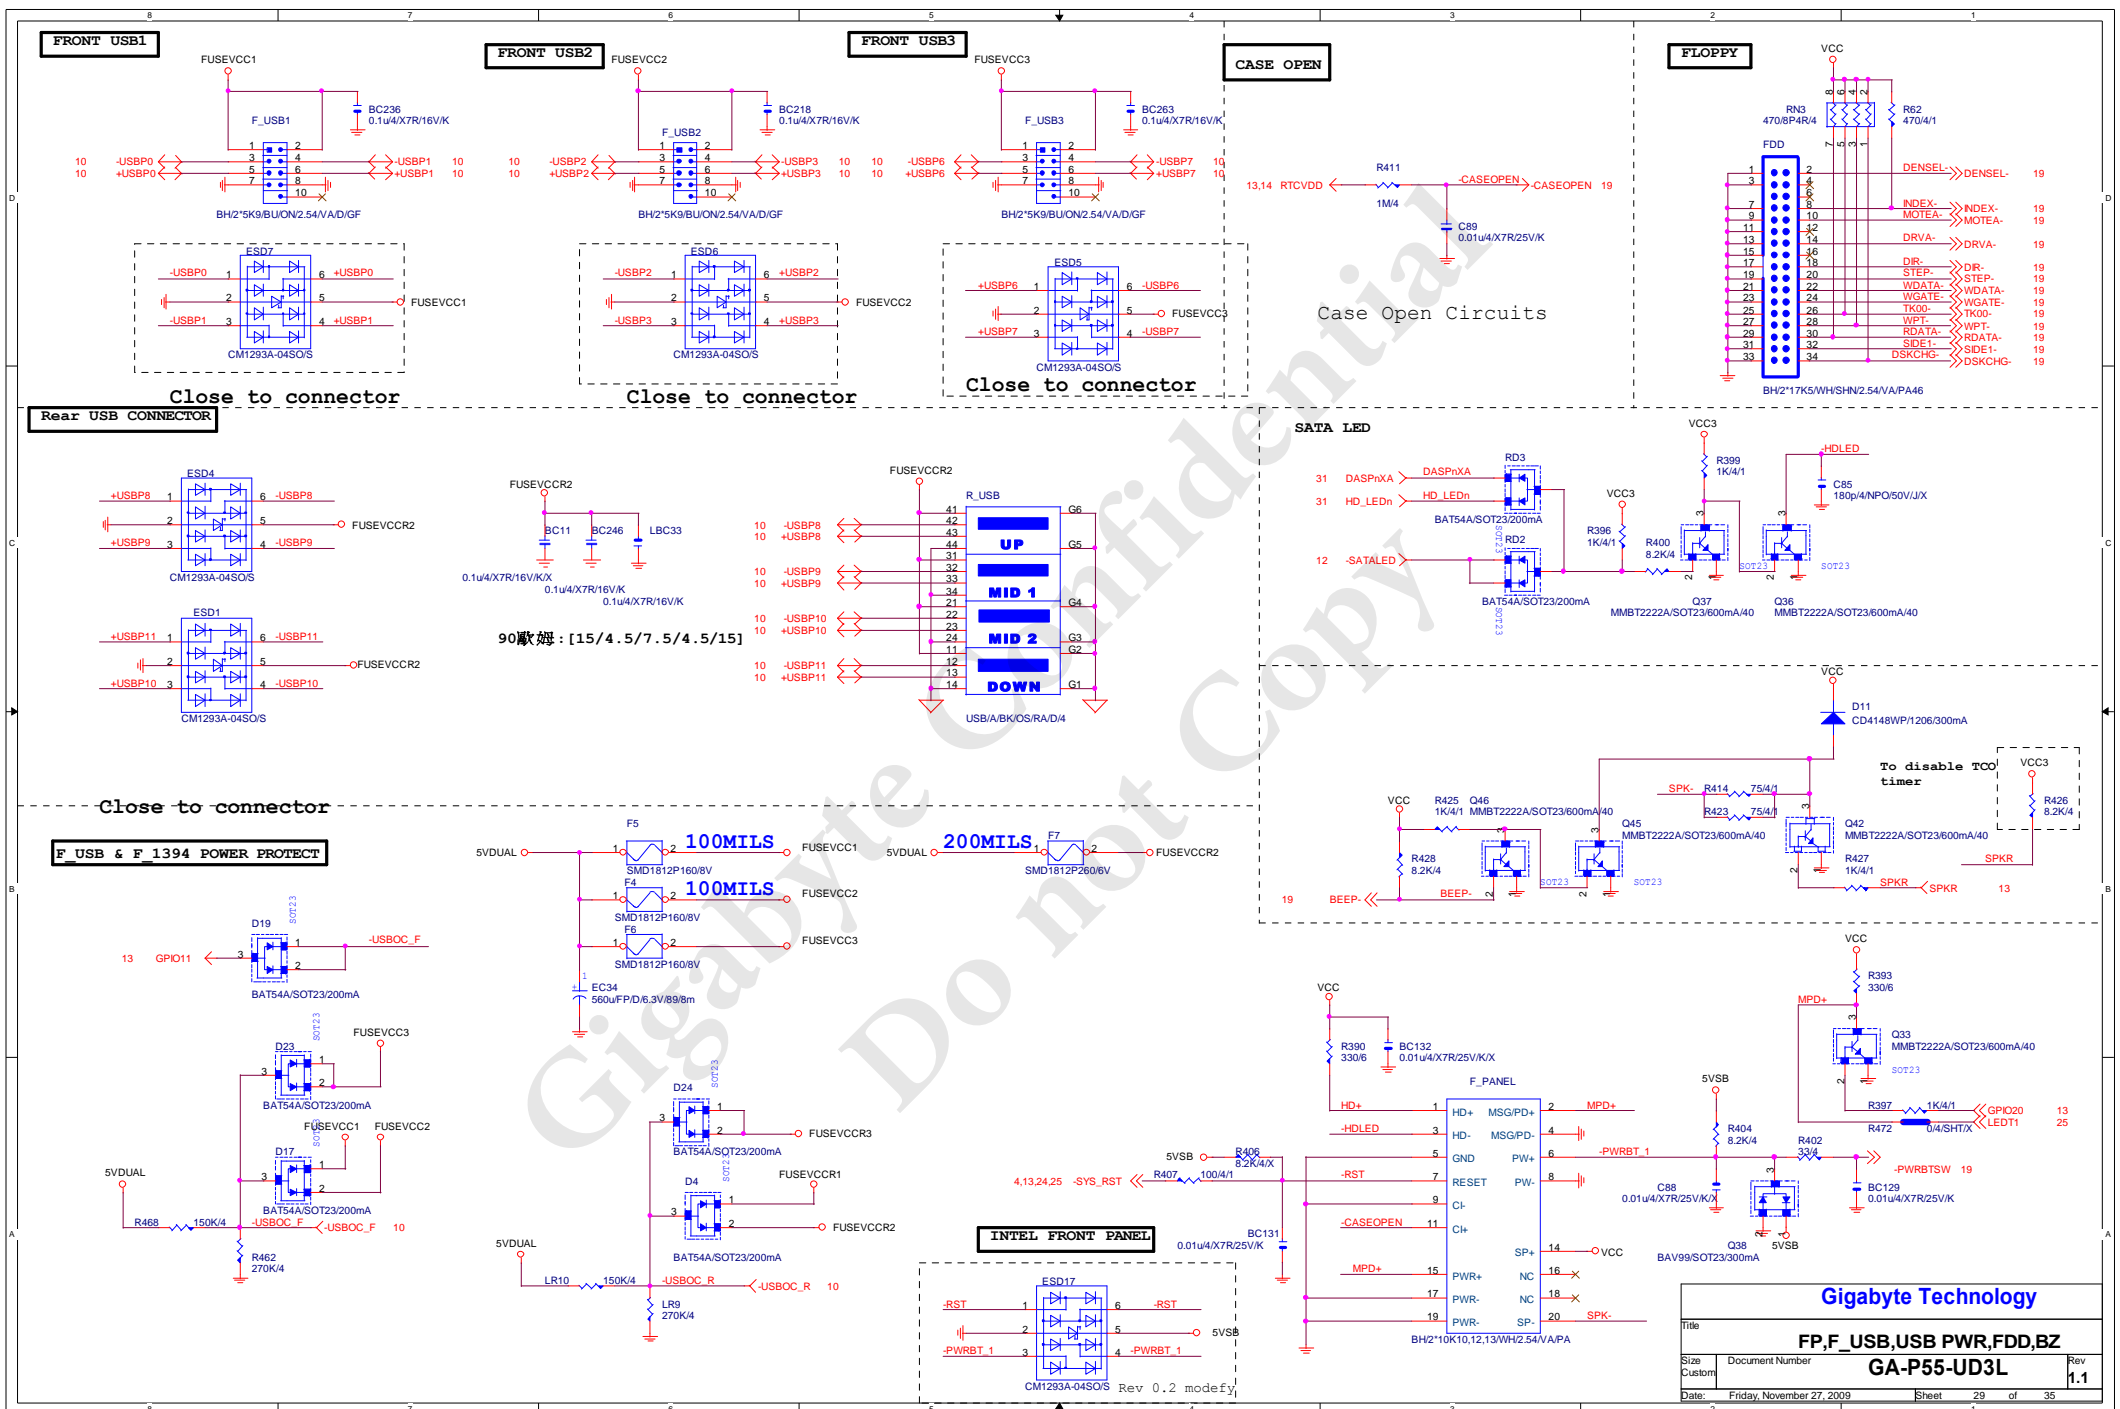

ATX POWER CONNECTOR

Diagram illustrating the ATX Power Connector circuit, showing the connection of the ATX power plug (pins 1-24) to the motherboard's power distribution network.

Key Components and Connections:


- ATX Power Plug Pins:** 13 (3.3V), 14 (-12V), 15 (GND), 16 (PSON), 17 (GND), 18 (GND), 19 (GND), 20 (-5V), 21 (5V), 22 (5V), 23 (5V), 24 (GND).
- Capacitors:** BC228 (1u/6/X7R/16V/K), BC231 (0.1u/4/X7R/16V/K), BC232 (0.1u/4/X7R/16V/K/X), BC233 (0.1u/4/X7R/16V/K), BC234 (0.1u/4/X7R/16V/K), BC225 (1u/4/X5R/6.3V/K), BC235 (1u/4/X5R/6.3V/K), BC226 (22u/8/X5R/6.3V/M), BC229 (1u/6/X7R/16V/K), BC230 (510/6/X), C178 (0.1u/4/X7R/16V/K).
- Diodes:** V12 (BC21, 0.1u/4/X7R/16V/K).
- MOSFET:** APW12*12IV/A/SN2SHKPA66.
- Other Components:** BC227 (510/6/X), BC230 (510/6/X).

Notes:


- To prevent the 5VSB under loading when boot.
- APW12*12IV/A/SN2SHKPA66

Additional Components and Connections:

- Memory Modules (MH1-MH6):** HOLE_3/X.
- SATA Connectors (K1-K6):** K1_1CT/X.
- USB Connectors (I1-I5):** 4MMH/X.











Gigabyte Technology			
Title			
ATX POWER CONNECTOR			
Size B	Document Number	GA-P55-UD3L	Rev 1.1
Date:	Friday, November 27, 2009	Sheet 30 of 35	


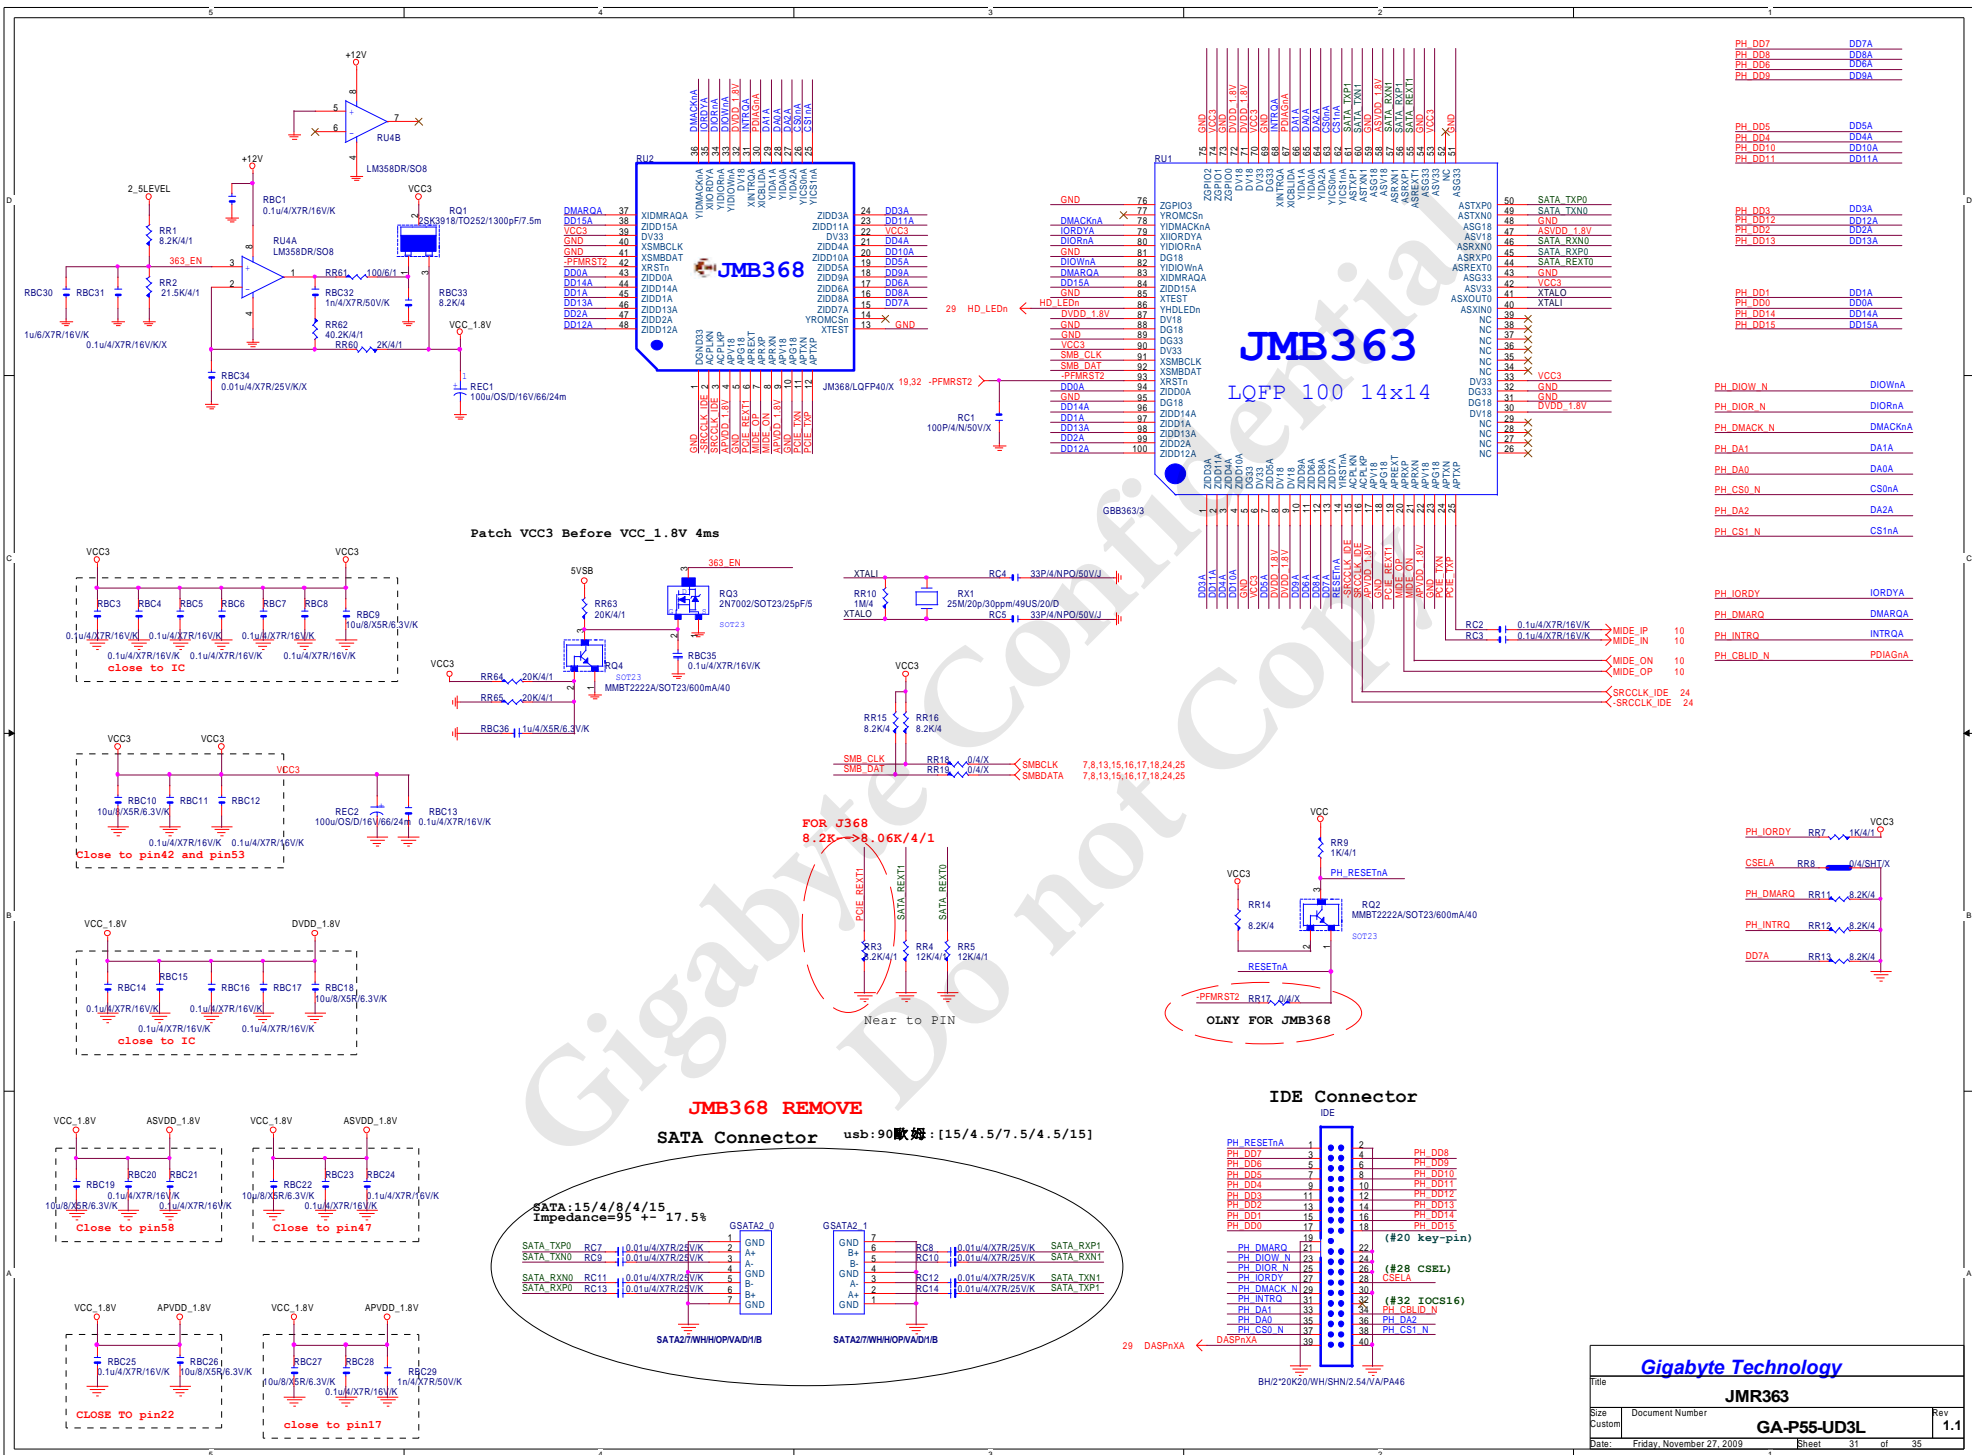



Power domain chart














```
for RT8111B N/C
for RT8111C 0 ohm
(Internal Regulator)
for RT8111C N/C
(external Regulator)
```

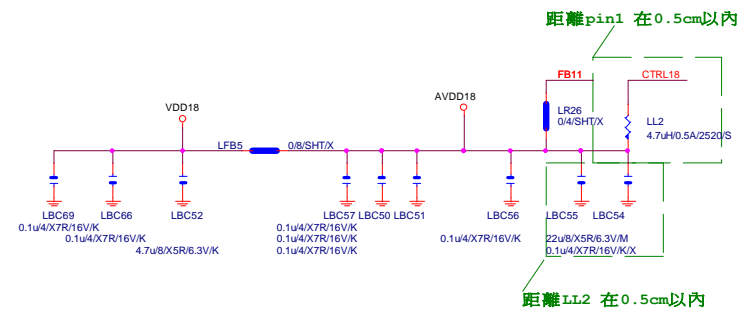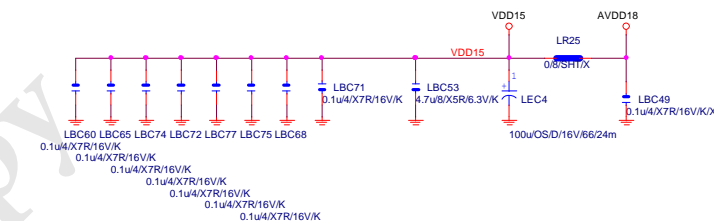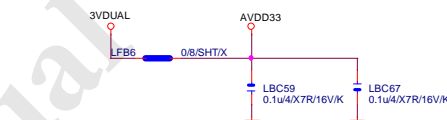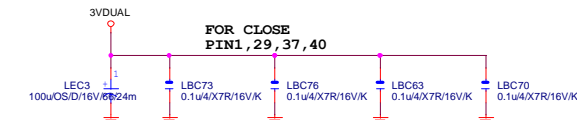

90歐姆：[20/4/8/4/20]



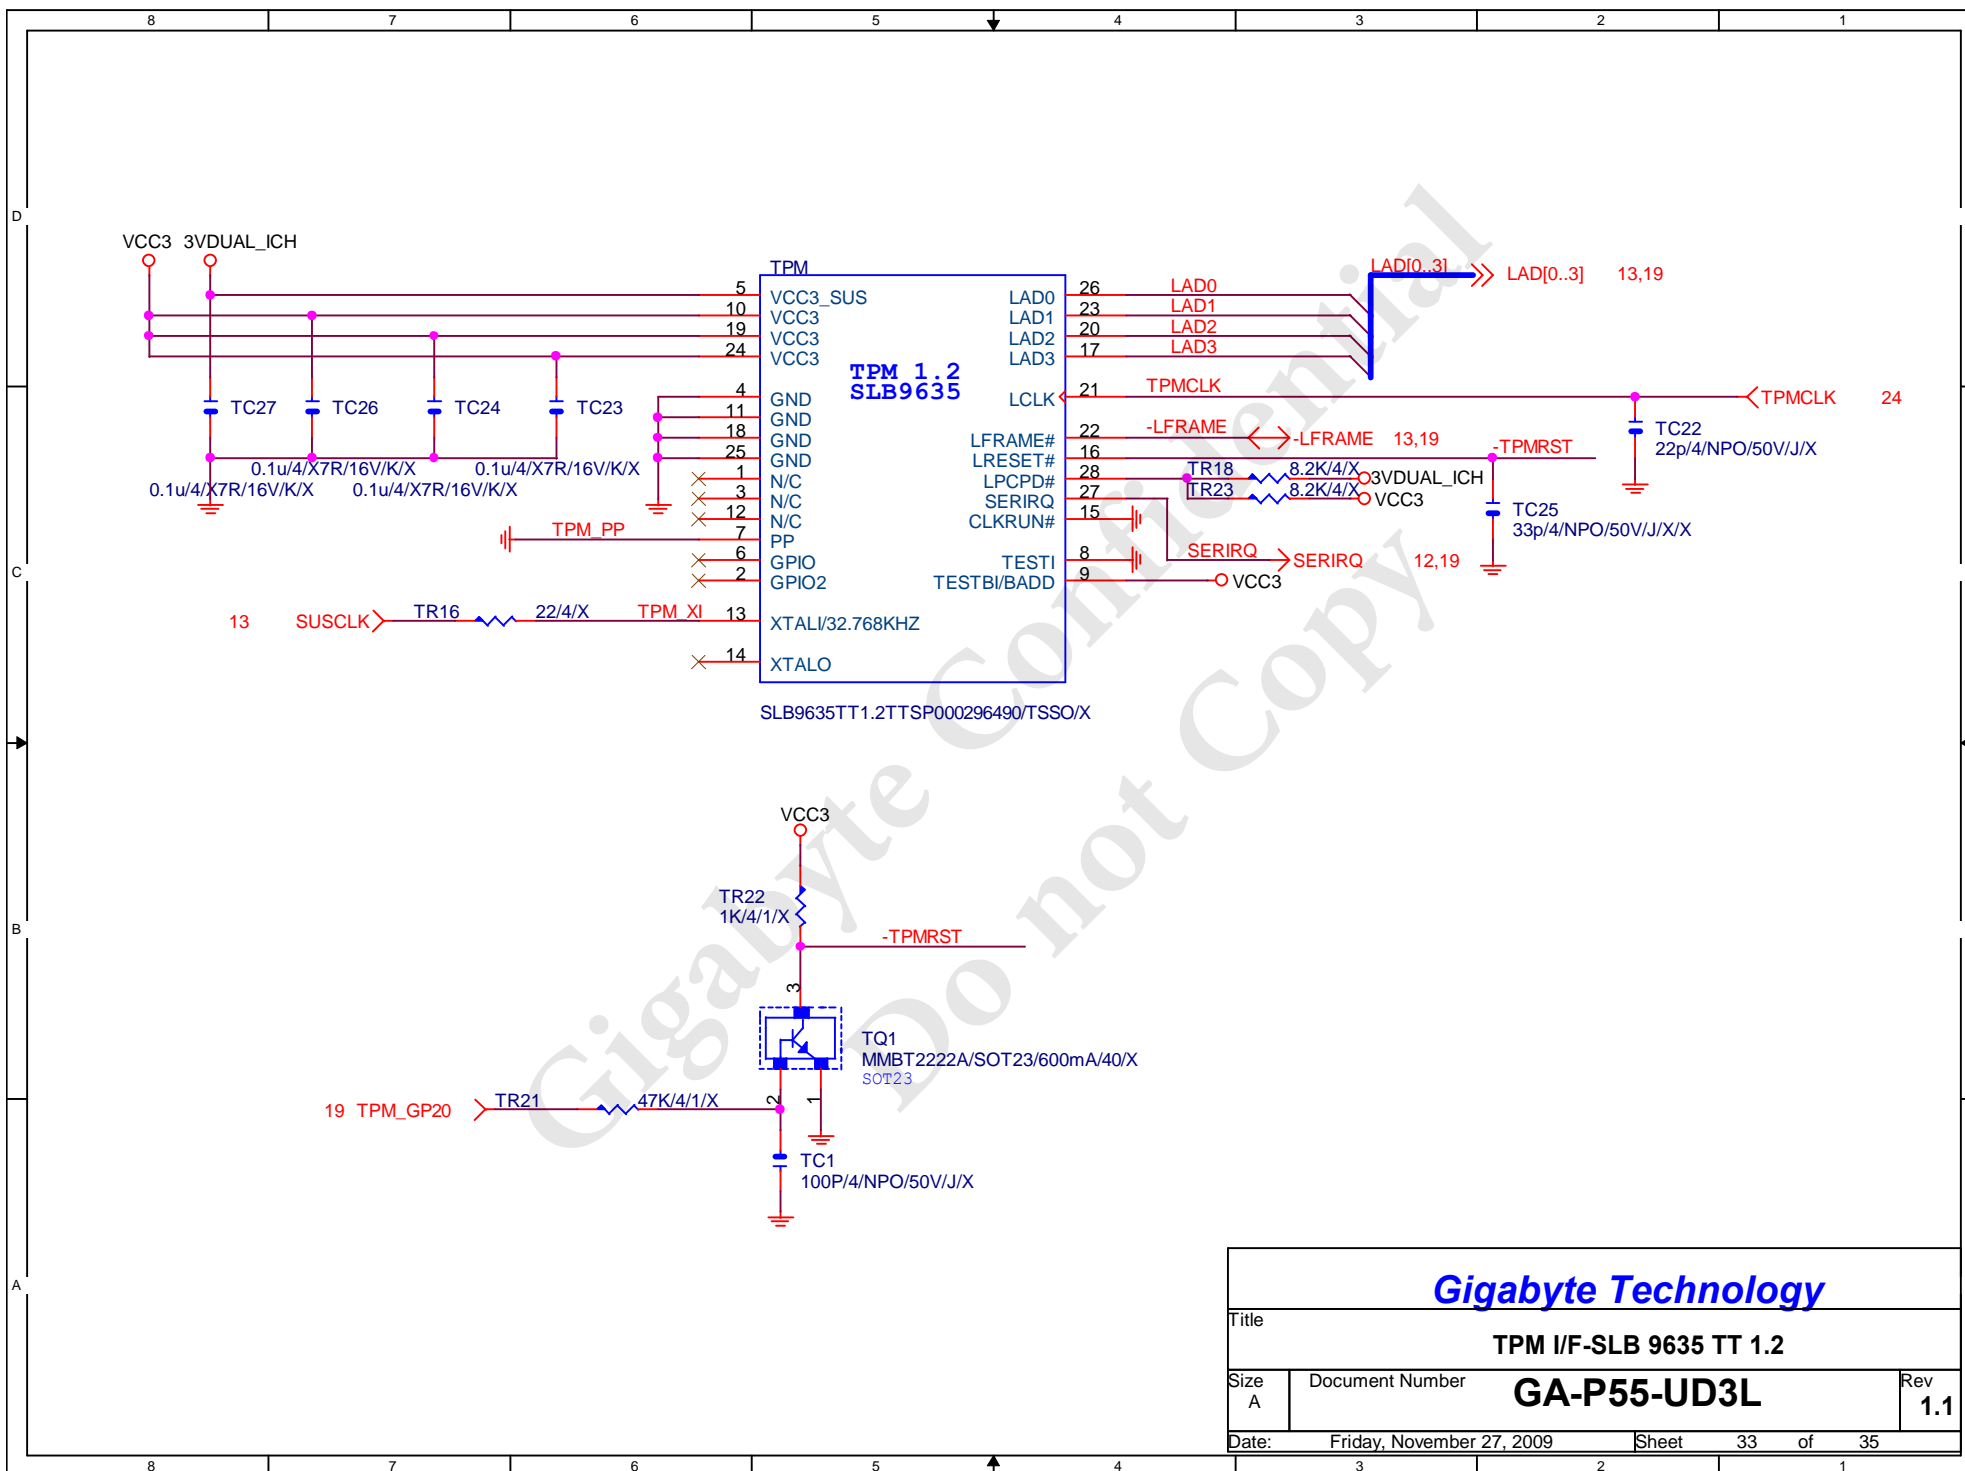

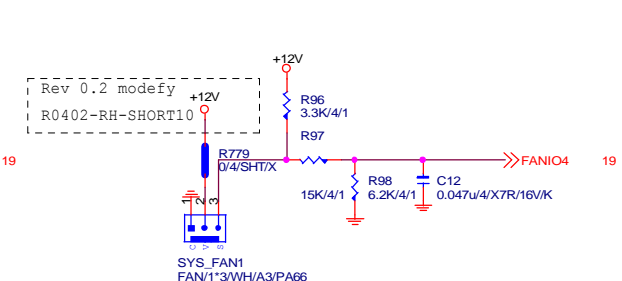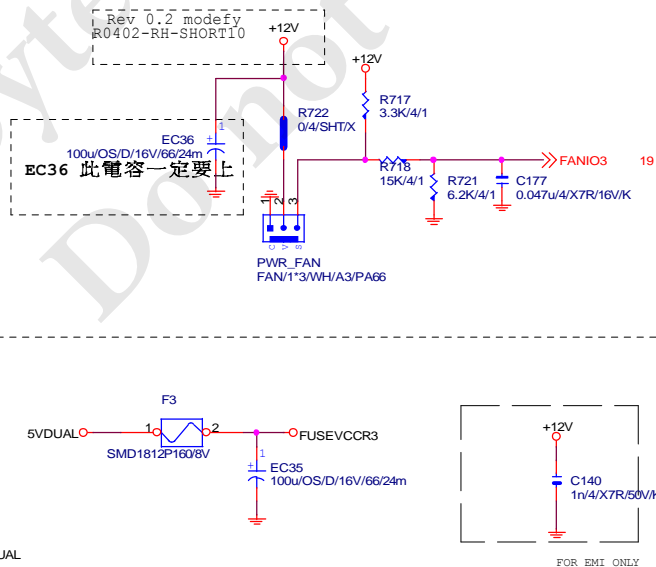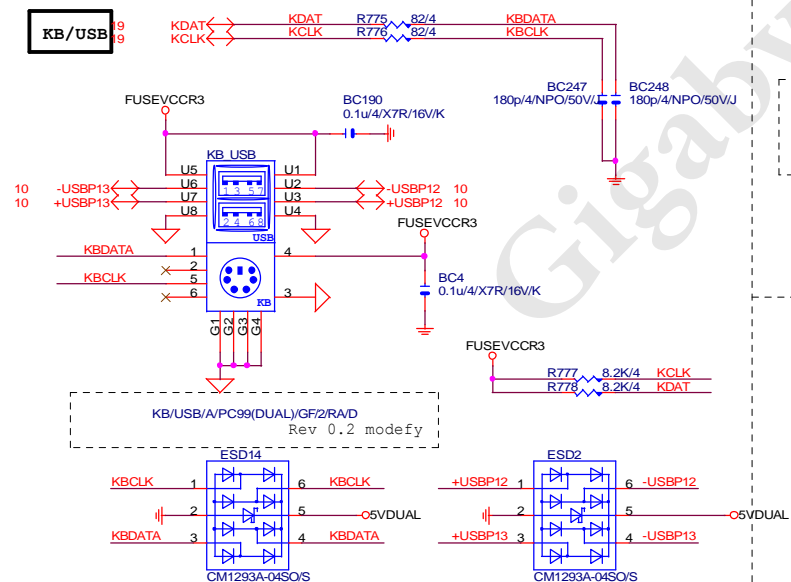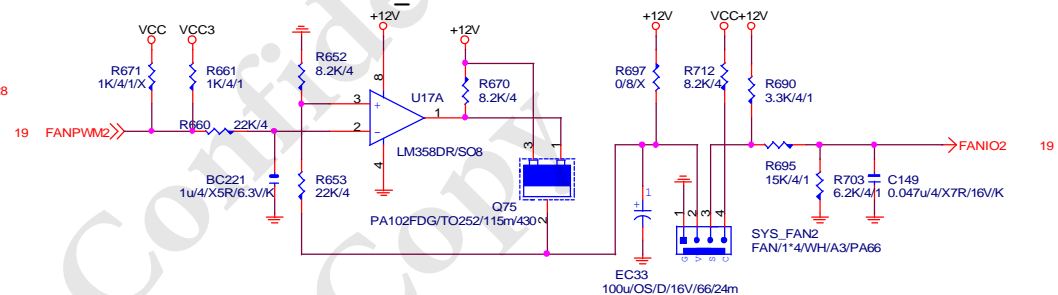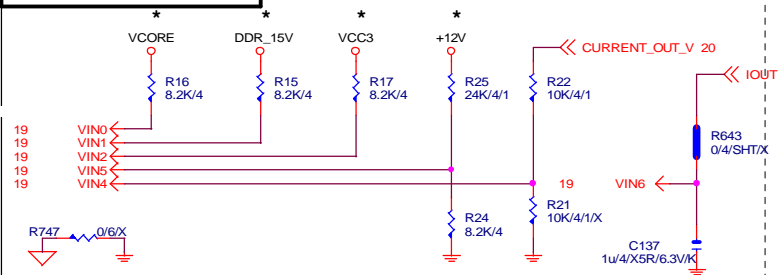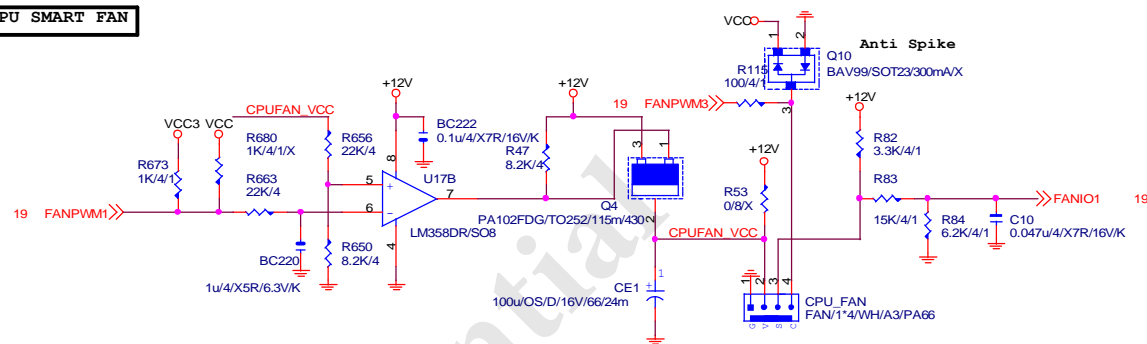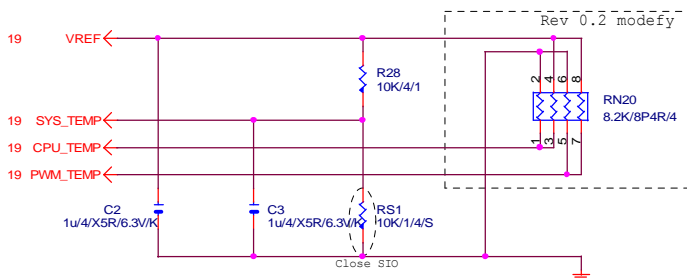


PCH GPIO LIST TABLE

PIN NAME	PWR	Default	USAG	NOTE
GP0	MAIN	H-Z	GPI -PECI_REQ	N/A
GP1/TACH1	MAIN		GPI ICH_FAN_TACH1	N/A
GP2/PIRQE#	MAIN		GPI -PIRQE	P/U 8.2K VCC3
GP3/PIRQF#	MAIN		GPI -PIRQF	P/U 8.2K VCC3
GP4/PIRQG#	MAIN		GPI -PIRQG	P/U 8.2K VCC3
GP5/PIRQH#	MAIN		GPI -PIRQH	P/U 8.2K VCC3
GP6/TACH2	MAIN		GPI ICH_FAN_TACH2	N/A
GP7/TACH3	MAIN		GPI ICH_FAN_TACH3	N/A
GP8	STBY	H	GPO GPIO8	P/U 8.2K 3VDUAL
GP9/OC5#	STBY		NATIVE OC5#	N/A
GP10/OC6#	STBY		NATIVE OC6#	N/A
GP11/SMBALERT#	STBY		NATIVE -SMBALERT	P/U 8.2K 3VDUAL
GP12	STBY	L	GPI LAN_PHY_PWR_CTRL	P/U 8.2K 3VDUAL
GP13	STBY	L	GPI GPIO13	P/U 8.2K 3VDUAL
GP14/OC7#	STBY		NATIVE OC7#	N/A
GP15	STBY	L	GPO GPIO15	N/A
GP16	MAIN		GPI -SKTOCC	P/U 8.2K VCC3
GP17/TACH0	MAIN		GPI ICH_FAN_TACH0	N/A
GP18	MAIN		NATIVE MB_ID0	P/D 8.2K GND
GP19	MAIN		GPI -LAN1_ISO	P/U 8.2K VCC3
GP20	MAIN		NATIVE LED_CTL	P/U 1K VCC3
GP21	MAIN		GPI VCC18_PCH_OV2	P/U 8.2K VCC3
GP22	MAIN	H-Z	GPI VCORE_OV3	P/U 8.2K VCC3
GP23	MAIN		NATIVE -LDRQ1	P/U 8.2K VCC3
GP24	STBY	L	GPO TLS	P/U 8.2K 3VDUAL
GP25	STBY		NATIVE -CPU_STOP	P/U 8.2K 3VDUAL
GP26	STBY		NATIVE -ACZ_DET	P/U 8.2K 3VDUAL
GP27	STBY	H	GPO GPIO27	P/U 8.2K 3VDUAL
GP28	STBY	H	GPO GPIO28	P/U 8.2K 3VDUAL
GP29	STBY	L	GPI GPIO29	N/A
GP30	STBY	H-Z	GPI S_PWR_ACK	P/U 100K 3VDUAL
GP31	STBY	H-Z	GPI N/A(Reverse)	P/U 8.2K VCC3
GP32	MAIN	H	GPO MB_ID1	P/D 8.2K GND
GP33	MAIN	H	GPO LOAD-LINE	P/U 1K VCC3
GP34	MAIN	H-Z	GPI -PCI_STOP	P/U 8.2K VCC3
GP35	MAIN	L	GPO GPIO35	P/U 8.2K VCC3
GP36	MAIN		GPI -LAN1_DSM	P/U 8.2K VCC3
GP37	MAIN		GPI N/A	P/U 8.2K VCC3
GP38	MAIN	H-Z	GPI VCORE_OV2	P/U 8.2K VCC3
GP39	MAIN	H-Z	GPI -LAN_DSM	P/U 8.2K VCC3
GP40	STBY		NATIVE OCL#	N/A
GP41	STBY		NATIVE OC2#	N/A
GP42	STBY		NATIVE OC3#	N/A
GP43	STBY		NATIVE OC4#	N/A
GP44	STBY	L	NATIVE N/A	P/U 8.2K 3VDUAL
GP45	STBY		NATIVE -LPCPME	P/U 8.2K 3VDUAL
GP46	STBY	L	NATIVE PWR_LED	P/U 8.2K 3VDUAL
GP47	STBY		NATIVE PSI_LED	P/U 8.2K 3VDUAL
GP48	MAIN	H-Z	IN EN_PWM	P/U 8.2K VCC3
GP49	MAIN	H-Z	IN VCC18_OV1	P/U 8.2K VCC3
GP50	MAIN		NATIVE -REQ1	P/U 2.2K VCC
GP51	MAIN	H	NATIVE -GNT1	N/A
GP52	MAIN		NATIVE -REQ2	P/U 2.2K VCC
GP53	MAIN	H	NATIVE -GNT2	N/A
GP54	MAIN		NATIVE -REQ3	P/U 2.2K VCC
GP55	MAIN	H	NATIVE -GNT3	N/A
GP56	STBY		NATIVE N/A(Reverse)	P/U 8.2K 3VDUAL
GP57	STBY	H-Z	IN VCORE_OV1	P/U 8.2K 3VDUAL
GP58	STBY	H-Z	NATIVE F_USB_OC	P/U 8.2K 3VDUAL
GP59	STBY		NATIVE USB_OCO#	N/A
GP60	STBY	H-Z	NATIVE N/A(Reverse)	P/U 8.2K 3VDUAL
GP61	STBY	L	NATIVE -SUSTAT	N/A
GP62	STBY	L	NATIVE SUSCLK	N/A
GP63	STBY	L	NATIVE GPIO63	N/A
GP64	MAIN	L	NATIVE CLKOUTFLEX0	N/A
GP65	MAIN	L	NATIVE CLKOUTFLEX1	N/A
GP66	MAIN	L	NATIVE CLKOUTFLEX2	N/A
GP67	MAIN	L	NATIVE CLKOUTFLEX3	N/A
GP72	STBY	H-Z	NATIVE VCORE_OV4	P/U 8.2K 3VDUAL
GP73	STBY		NATIVE 1_05V_OV1	P/U 8.2K 3VDUAL
GP74	STBY	H-Z	NATIVE 1_05V_OV2	P/U 8.2K 3VDUAL
GP75	STBY	H-Z	NATIVE N/A(Reverse)	P/U 8.2K 3VDUAL

Super I/O ITE8720 GPIO Table

PIN NAME	USAG	NOTE
SVC/PECI_RQT/GP14	-PECI_REQ	
PWROK1/GP13	PWROK1/ITE_PWROK	
KRST#/GP62	-KBRST	
SO/GP50	-ICH_SPI_CS	
IRTX/GP47/CE2_N/JP7	CEB_N	
GP46/IRRX	-LAN2_DSM	
PSION#/GP42	-PSON	
PWROK2#/GP41	PECI_CTL	
PCIRST3#/GP10/VDIMM_STR_EN	-PCIE_RST	
RSMRST#CIRRX1/GP55	-RSMRST	
PME#/GP54	-LPCPME	
PD5/GP75/BUSSO0	N/A	

PIN NAME	USAG	NOTE
FAN_TAC2/GP52	FANIO2	
FAN_TAC3/GP37	FANIO3	
VIDO3/FAN_TAC4/GP25/DSR2#	FANIO4	
FAN_CTL2/GP51	FANPWM2	
FAN_CTL3/GP36	FANPWM3	
VID4/GP34	BEEP-	
VID3/GP33	TURBO1	
VID2/GP32	TURBO0	
VCORE_GOOD/VID6/GP63	CPUT_LED1_C	
VID5/GP35	CPUT_LED2_C	
VID1/GP31	CPUT_LED3_C	
VID0/GP30	-LAN1_DSM	NBT_LED1_C
SLCT/GP80	CPU_LED1_C	
PE/GP81	CPU_LED2_C	
BUSY/GP82	CPU_LED3_C	
PD3/GP73/BUSSI1	SB_LED1_C	
PD4/GP74/BUSSI2	SB_LED2_C	
VCORE_EN/VID7/GP64	IT_GP64	SB_LED3_C
PD0/GP70	NB_LED1_C	
PD1/GP71	NB_LED2_C	
PD2/GP72/BUSSIO	NB_LED3_C	
GP22/SCK	LOW_PWR_1	
VIDO5/GP27/SIN2	LOW_PWR_2	
PCIRST2#/GP11	-PFMRST1	
PCIRST1#/GP12	-PFMRST2	
3VSB5W#/GP40	CSI_F0	BSEL166_1
SUSC#/GP53	CSI_F1	BSEL166_2
GP23/SI	BSEL166_3/CSISBSL	
VIDO0/GP20/CTS2#	CPUT_LED1_C	BSEL166_4
GP65/VDDA_EN/GB_01	MB_ID2	
PD6/GP76/BUSSO1	MB_ID3	
PD7/GP77/BUSSO2	MB_ID4	
AFD#/GP86/SMB_C_R	SEC_PIN	FST_2X8
INIT#/GP85/SMBD_M	SEC_2x8	GTLREF_AD2
ACK#/GP83	DDR_LED1_C	
VIDO1/GP21/DCD2#	DDR_LED2_C	
STB#/GP87/SMB_C_M	DDR_LED3_C	
PWRON#/GP44	VCORE_OV1	
PANSWH#/GP43	PWRBTSW	
KDAT/GP61	-PWRBTSW	
KCLK/GP60	KDAT	
MDAT/GP57	KCLK	
MACL/GP56	MDAT	
GP66/VLDT_EN/GB_02	NBT_LED1_C	MCLK
SVD/PCIRSTIN#/CIRRX/GP15	PWM2_CR	
KDAT/GP61	PWM2_CR	
GP67/CPU_PG/GB_03	EN_LOADLINE	IT_GP67/-EN_PWM2
SLIN#/GP84/SMBD_R	-EN_PWM2	
PSI_L/FAN_CLT5/CIRRX2/GP16	-THERM	
VIDO4/GP26/SOUT2	DDR18V_PH2_EN	
VIDO2/FAN_TAC5/GP24/DSR2#	DDR18V_LED	
VIDO6/GP17/RI2#	1_1V_PH_EN	
VIDO7/JP6/DTR2#	JP6	
PD5/GP75/BUSSO0	SB_LED3_C	

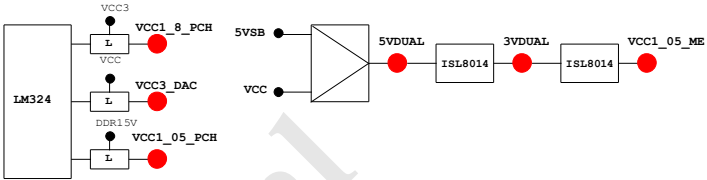

PWM各相位的擺法如下：

